

1976 CHEVROLET TRUCK

CAMPER LOADING

CONSUMER INFORMATION

This Consumer Information booklet is designed to provide basic information relating to load capabilities of 1976 Chevrolet Truck models which are adaptable to slide-in camper applications. Information herein is applicable to the truck buyer that already owns a 1976 Chevrolet Truck or the prospective truck purchaser.

AUGUST, 1975



Chevrolet

1976 CHEVROLET TRUCKS

Consumer Information **Truck—Camper Loading**

CONSUMER INFORMATION REGULATION 575.103 issued by the National Highway Traffic Safety Administration requires manufacturers of trucks capable of accommodating slide-in camper bodies to provide information concerning proper load and proper load distribution in truck-camper applications.

The Regulation also provides that proper truck-camper loading information is to be maintained in truck dealerships and be made available to all prospects on request. This booklet relates to the 1976 Chevrolet Truck models recommended for slide-in camper applications and is to be used as a consumer information piece.

Product specifications or data contained herein may change periodically. When a revision of this booklet is supplied to truck dealers, it is the dealers' responsibility to make the revised information available to the public.


All specifications contained herein are based on the latest product information available at the time of publication. Chevrolet reserves the right to discontinue or change at any time, without notice, any prices, colors, parts, materials, optional equipment, accessories, special equipment, specifications and/or body types or models. CHEVROLET MOTOR DIVISION, GENERAL MOTORS CORPORATION, DETROIT, MICHIGAN 48202.

TRUCK—CAMPER LOADING

Consumer Information Regulation 575.103 requires manufacturers of trucks that would accommodate slide-in campers to specify the vehicles' Cargo Weight Rating (CWR) and the longitudinal limits within which the center of gravity for the cargo weight rating should be located.

Cargo Weight Rating (CWR)—The cargo weight rating of a vehicle means the value specified by the manufacturer as the cargo-carrying capacity of a vehicle, in pounds exclusive of the weight of occupants, computed as 150 pounds times the number of designated seating positions.

Longitudinal Center of Gravity (CG)—The forward limit of the recommended CG Zone is determined by the application of dimension "A" measured in inches from the rear of the truck bed. The rearward limit of the recommended CG Zone is established by application of dimension "B", also measured in inches from the rear of the truck bed. The recommended CG Zone lies between these points.

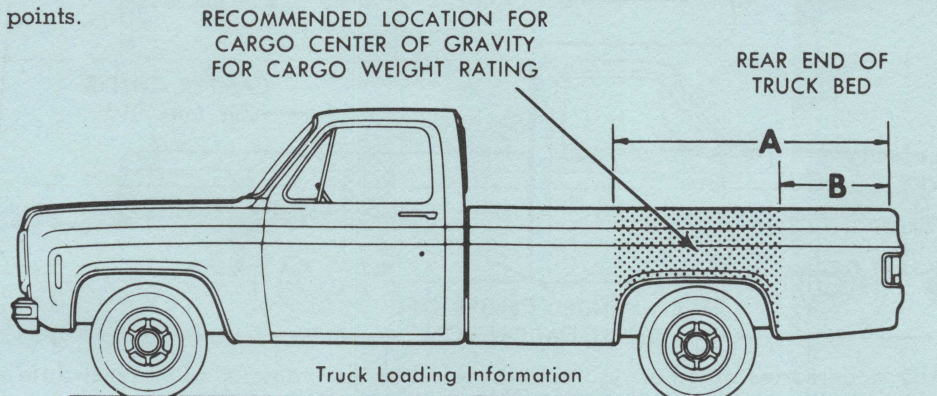

Model _____ Calculated
Cargo Weight Rating _____

Dimension A _____ Dimension B _____

Limitations on Recommended CG Zones

FORWARD LIMIT

- (1) Must not extend beyond the inside surface (dimension IL shown on line drawings on pages 17 through 19 of the pickup box.
- (2) The front gross axle weight rating (GAWR) must not be exceeded.

REARWARD LIMIT

- (1) Must be no farther rearward than the inside surface (dimension IL shown on line drawing on pages 17 through 19) of the pickup box.
- (2) Must not exceed the gross axle weight rating on the rear axle.
- (3) On Series 10 trucks the rear axle loading is limited to 62% of the vehicle's Gross Vehicle Weight Rating (GVWR).
- (4) On Series 20 and 30 trucks the rear axle loading is limited to 70% of the vehicle's Gross Vehicle Weight Rating (GVWR).

Vehicle (CG) Identification—All General Motors Corporation trucks that may be suitable for carrying a slide-in camper incorporate Truck-Camper Loading information on the Vehicle Identification Plate located on the left door lock pillar. *The vehicle identification number (VIN), the as manufactured cargo weight rating (CWR) of that vehicle plus the CG limits of Dimension "A" and "B" for that vehicle in inches is included.


Gross Vehicle Weight Rating (GVWR) and Gross Axle Weight Ratings (GAWR) are also included on this plate.

Vehicle and Truck-Camper Loading are also discussed at length in the first few pages of the Vehicle Owner's Manual.

*Except LUV pickup. All LUV pickup trucks have a consumer information booklet in the glove box.

TRUCK—CAMPER LOADING

Loading Instructions—When the truck is used to carry a slide-in camper, the total cargo load of the truck consists of the manufacturer's camper weight figure, the weight of installed additional camper equipment not included in the manufacturer's camper weight figure, the weight of camper cargo and the weight of passengers *in the camper*. The total cargo load should not exceed the truck's cargo weight rating (CWR) and the camper's center of gravity should fall within the truck's recommended center of gravity zone when installed.

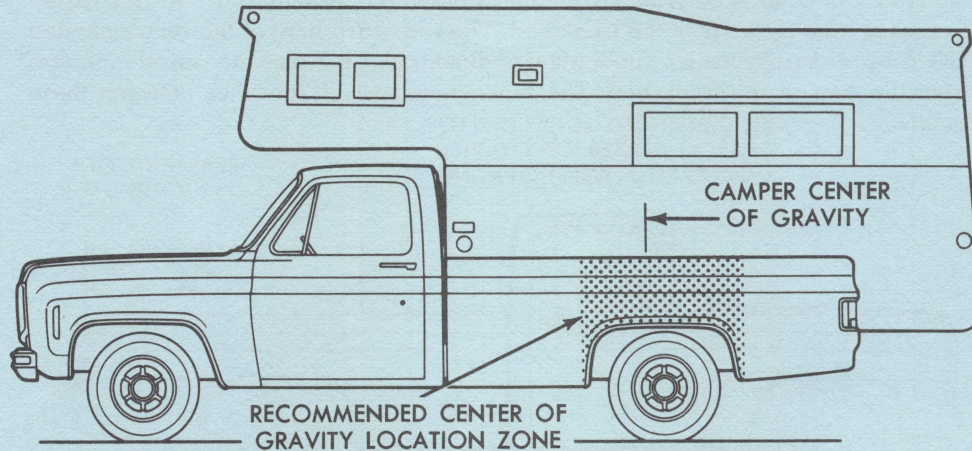

Any accessories or other equipment added to this vehicle, after final date of manufacture, must be weighed or have their weight determined, and the weight deducted from the prescribed cargo weight rating (CWR) of this vehicle. This may decrease the permissible longitudinal zone of the center of gravity for this vehicle.

The longitudinal center of gravity zone has been determined for the full cargo weight rating of this truck. If a slide-in camper has a total weight less than the cargo weight rating (CWR), the permissible longitudinal zone of the center of gravity may be larger. However, individual axle loads should not exceed either of the gross axle weight ratings (GAWR).

Secure loose items to prevent weight shifts that could affect the balance of your vehicle. When the truck camper is loaded, drive to a scale and weigh on the front and on the rear wheels separately to determine the axle loads. Individual axle loads should not exceed either of the gross axle weight ratings (GAWR). The total of the axle loads should not exceed the gross vehicle weight rating (GVWR). These ratings are given on the vehicle identification plate and on the vehicle certification label which are located on the left side of the vehicle, normally on the door latch post or door edge next to the driver. If weight ratings are exceeded, move or remove items to bring all weights below the ratings.

CAUTION: The longitudinal center of gravity is only one of the many factors which may affect the overall performance of a vehicle, including handling, steering and braking. The recommended, longitudinal limits for the camper's center of gravity are based on the assumption that the vehicle will be operated with reasonable prudence in light of all of the existing conditions. Failure to do so could result in unsatisfactory vehicle performance and could make the vehicle unsafe to operate.

In this connection, refer to any recommendations by the slide-in camper manufacturer regarding installation and loading of the camper.

TRUCK—CAMPER LOADING

If you are contemplating the purchase of a 1976 Chevrolet Truck for slide-in camper applications, the following pages are included for your reference in calculating the desired vehicle cargo weight rating capability and longitudinal center of gravity zone.

	Page
Definition of Terms	6
Vehicle Selection and Weight Analysis	7
Worksheet—Cargo Weight Rating	8
Model Codes and Dimensions	9
Formula for Calculating CG Zone	10
LUV Series 4	11
Pickup Model Selector	12
Standard Specifications	13-16
Model Weights	17-19
GVW Selector and Tire Availability Charts	20-22
Power Team Selector	23-24
Model Options and Weights	25-41
Tire Options and Weights	42-61
Dealer Installed Accessory Weights	62

TRUCK—CAMPER LOADING

For the purposes of calculating Truck-Camper Loading in this book listed below are some common terms and abbreviations:

Cargo Weight Rating (CWR)—means the value specified by the manufacturer as the cargo-carrying capacity, in pounds, of a vehicle, exclusive of the weight of occupants, computed as 150 pounds times the number of designated seating positions.

Center of Gravity (CG)—Point where the mass of a body is concentrated and if suspended at that point would balance front and rear.

Curb Weight—Weight of a vehicle without driver, passengers or cargo but including fuel, coolant and other items of standard equipment.

Gross Vehicle Weight Rating or "GVWR" means the value specified by the manufacturer as the loaded weight of a single vehicle.

Gross Axle Weight Rating or "GAWR" means the value specified by the vehicle manufacturer as the load carrying capacity of a single axle system measured at the tire-ground interfaces.

Model Weight—Weight of the vehicle with all items of standard equipment, 150 lbs per passenger in each designated seating position and max capacity of fuel, oil and coolant.

Slide-in Camper—means a camper having a roof, floor, and sides, designed to be mounted on and removable from the cargo area of a truck by the user.

Weight Distribution—The amount of a vehicle's weight that rests on each axle.

Wheelbase (WB)—The distance from the center line of the front axle to the centerline of the rear axle.

LIMITATIONS

The following Chevrolet truck models are not recommended for slide-in camper applications:

- El Camino—all models
 - Any pickup model with a cargo weight rating of less than 500 lbs. A statement is imprinted on the VIN Plate which states that the vehicle should not be used to carry a slide-in camper.
-

TRUCK—CAMPER LOADING

INSTRUCTIONS: VEHICLE SELECTION AND WEIGHT ANALYSIS

1. From the model selector on page 12, select the pickup truck model you desire. The GVW selector on pages 20 through 22 lists the available GVW ratings for each model. Select the GVW you require and note the minimum tire size and chassis equipment required for that GVW rating. To approximate the GVW rating you require, add your loaded camper weight to the vehicle total model weight shown on pages 17 through 19. Record this information on the computation sheet page 8.
 2. Record the front and rear model weights of your selected vehicle.
 3. In the appropriate sections of the computation sheet, record the chassis equipment you desire: tires, springs, stabilizer bars. Keep in mind that you must select suspension equipment having load capacities equal to or greater than those of the minimum equipment required for your selected GVW rating. (The capacities of standard springs are shown on pages 13 through 16.) Record the front and rear weight of each piece of equipment and the load capacity of the springs and tires in the appropriate columns.
 4. List all other factory installed options you desire with their front and rear weights on the computation sheet.
 5. Total front and rear weights of vehicle model and options to arrive at total front and rear weight of vehicle.
 6. Total front and rear weights of vehicle and subtract from the GVW rating to arrive at the cargo weight rating of your truck.
 - 7a. To determine the front gross axle weight rating (GAWR) of your vehicle, select the lowest of the front tire and front spring load capacities and multiply by 2. This will be the front GAWR(a).
 - 7b. The rear GAWR is computed in the same manner. Select the lowest of the rear tire and rear spring load capacities and multiply by 2(b).
 8. Proceed to calculate the center of gravity location using front and rear GAWR's, cargo weight rating, and front and rear weight of truck as determined above. Record this information on the computation sheet page 10.
- (a) The front GAWR cannot exceed 3400 lbs on K10 pickups or 3500 lbs on K20 pickups.
(b) The rear GAWR cannot exceed 3750 lbs on K10 pickups.
(c) The addition of any dealer installed or other accessories will reduce the cargo carrying capacity by the weight of equipment installed.

TRUCK-CAMPER LOADING

- ## 2. Model Weights

FRONT _____

REAR

- ### Load Capacity*

Tires: Front () _____

Rear () _____

Springs: Front

Rear

-
- This image shows a single sheet of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. There are approximately 20 lines visible. The paper appears to be a standard notebook page.

- 5a.
- Vehicle sub-total weight**
- (add front and rear weight)

- 5b. Add: 50 lbs for 117.5" WB models**
100 lbs for 131.5" WB models
100 lbs for 164.5" WB models

+

- 5c. **Adjusted total vehicle weight**

- ## 6. Vehicle GVW

Adjusted total vehicle weight (—)

Cargo Weight Rating _____

Record on page 3.

- ## 7. Gross Axle Weight Rating

A. Front:

1. Springs $\times 2 =$

2. Tires _____ $\times 2 =$ _____

B. Rear

1. Springs $\times 2 =$

2. Tires $\times 2 =$

**GROSS AXLE WEIGHT
RATING (LOWEST VALUE
OF AXLE CAPACITIES)**

* Load capacity is the rating in pounds for each tire, spring etc.

MODEL CODES AND DIMENSIONS

SERIES	MODEL NUMBER	PICKUP BOX LENGTH	PICKUP STYLE	WB	"C"
--------	--------------	-------------------	--------------	----	-----

2-WHEEL-DRIVE MODELS

C10	CC10703	6½'	Fleetside (E63)	117.5"	38.35"
			Stepside (E62)	117.5"	37.95"
	CC10903	8'	Fleetside (E63)	131.5"	44.25"
			Stepside (E62)	131.5"	43.85"
C20	CC20903	8'	Fleetside (E63)	131.5"	44.25"
			Stepside (E62)	131.5"	43.85"
C30	CC30903	8'	Fleetside (E63)	131.5"	44.25"
			Stepside (E62)	131.5"	43.85"

4-WHEEL-DRIVE MODELS

K10	CK10703	6½'	Fleetside (E63)	117.5"	37.95"
			Stepside (E62)	117.5"	38.32"
	CK10903	8'	Fleetside (E63)	131.5"	43.85"
			Stepside (E62)	131.5"	44.22"
K20	CK20903	8'	Fleetside (E63)	131.5"	43.85"
			Stepside (E62)	131.5"	44.22"


BONUS CAB MODELS

C20	CC20943	8'	Fleetside (E63)	164.5"	44.22"
C30	CC30943	8'	Fleetside (E63)	164.5"	44.22"


CREW CAB MODELS

C20	CC20963	8'	Fleetside (E63)	164.5"	44.22"
C30	CC30963	8'	Fleetside (E63)	164.5"	44.22"


FLEETSIDE

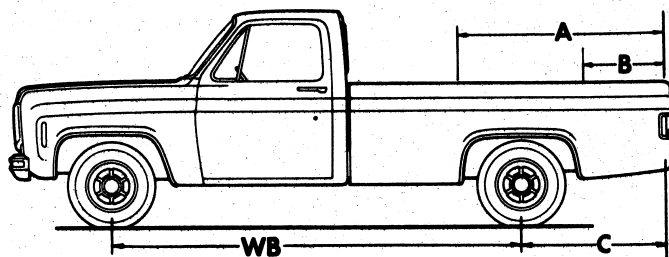

STEPSIDE

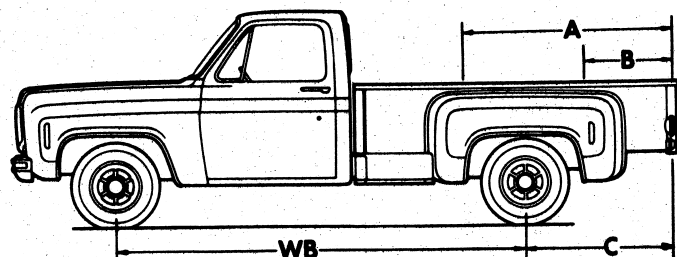

CREW CAB AND BONUS CAB

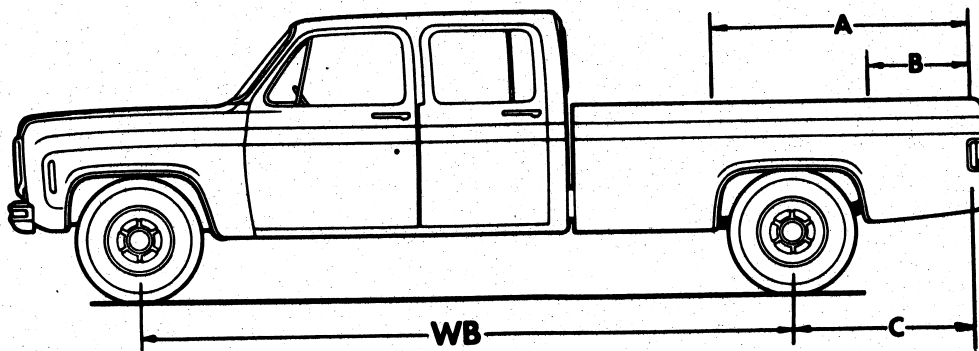

TRUCK—CAMPER LOADING

CALCULATIONS TO DETERMINE FORWARD (A) AND REARWARD (B) LOCATION OF CENTER OF GRAVITY FOR CARGO WEIGHT RATING

Calculations for A

$$A = \left\{ \frac{\text{Front GAWR} - 1.05 \times \text{Front Weight of Truck}}{\text{Cargo Weight Rating}} \right\} \times \text{W.B.} + C$$

Enter Front GAWR.....

Subtract Front Weight of Truck $\times 1.05$ - (.....)

Answer.....

Divide Answer by Cargo Weight..... \div

Answer.....

Multiply Answer by Wheelbase..... \times

(See Chart on Page 8)

Answer.....

Add C Dimension to Answer..... + C.....

(See Chart on Page 8)

A =

Note: If "A" is greater than pickup box length, use box length for "A" dimension.

Calculations for B

$$B = \left\{ 1 - \frac{\text{Rear GAWR} - 1.1 \times \text{Rear Weight of Truck}}{\text{Cargo Weight Rating}} \right\} \times \text{W.B.} + C$$

Enter Rear GAWR.....

Subtract Rear Weight of Truck $\times 1.1$ - (.....)

Answer.....

Divide Answer by Cargo Weight..... \div

Answer.....

Subtract Answer from 1.000..... - (.....)

Multiply Answer by Wheelbase..... \times

Answer.....

Add C Dimension to Answer..... + C.....


B =

Note: If "B" dimension is negative, use 0 (zero) for "B" dimension.

Record dimension A and B on page 3.

LUV PICKUP

(SERIES 4)

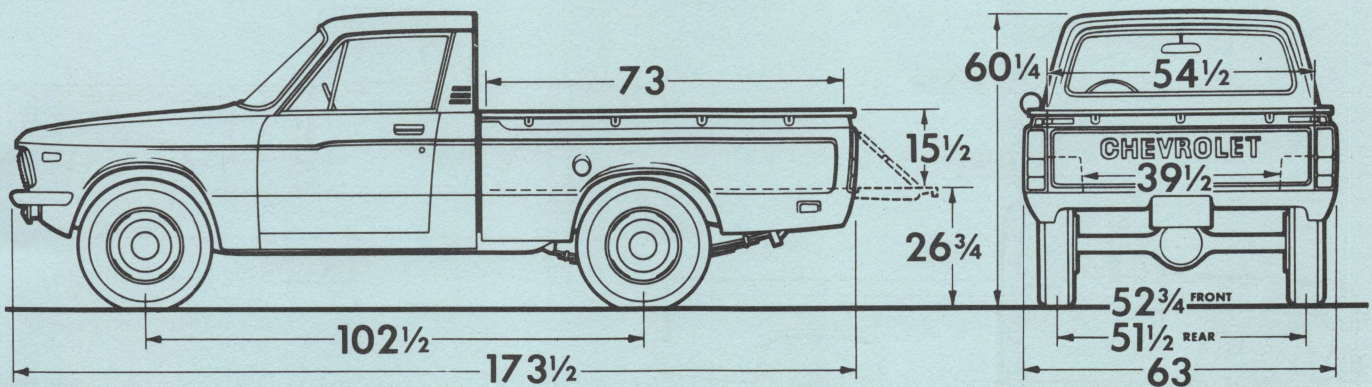

Model	Engine No. Cyl.	Curb Weight (lb)			Model Weights (lb)*			Ground Clearance (in)★
		Front	Rear	Total	Front	Rear	Total	Minimum
CL10503	4	1370	1120	2490	1535	1255	2790	8.1

★Dimensions with standard equipment, unloaded.

*Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ± 150 lbs. to allow for production build variation.

GVW SELECTOR

‡Maximum Ratings			Minimum Equipment Required for GVW Rating		
GVW Rating (lb)	▲ GAWR (lb)		Tires, Front	Tires, Rear	Chassis Equipment
	Front	Rear			
3950	1660	2650	6.00-14C (6PR)	6.00-14C (6PR)	Standard

‡ GAWR's shown are the maximum for each axle. When ordering a truck, the total of the actual weight on both front and rear axles cannot exceed the total GVW rating.

▲ GAWR—Gross Axle Weight Rating

CAMPER LOADING ZONE

DESCRIPTION	CARGO WEIGHT RATING (CWR)	DIMENSIONS	
		"A"	"B"
Vehicle without Air Conditioning	1100 lbs	52.2"	35.1"
Vehicle with Air Conditioning	998 lbs	45.5"	27.6"


Record Cargo Weight Rating and dimensions A and B on page 3.

PICKUP


PICKUP MODEL SELECTOR

REGULAR CAB

FLEETSIDE

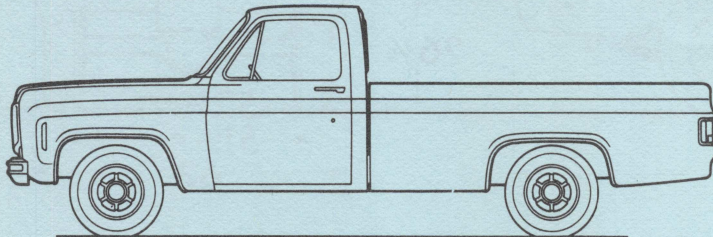


STEPSIDE

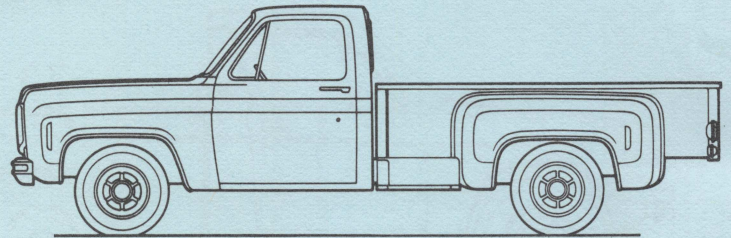

STEPSIDE

SERIES	MODEL NUMBER		BODY ORDERING CODE	
	6½' BOX	8' BOX	FLEETSIDE	STEPSIDE
C10	CC10703	CC10903	E63	E62
C10/F44	CC10703	CC10903	E63/F44	E62/F44
C20	—	CC20903	E63	E62
C30	—	CC30903	E63	E62
K10 (4-Wheel Drive)	CK10703	CK10903	E63	E62
K20 (4-Wheel Drive)	—	CK20903	E63	E62

CREW CAB AND BONUS CAB

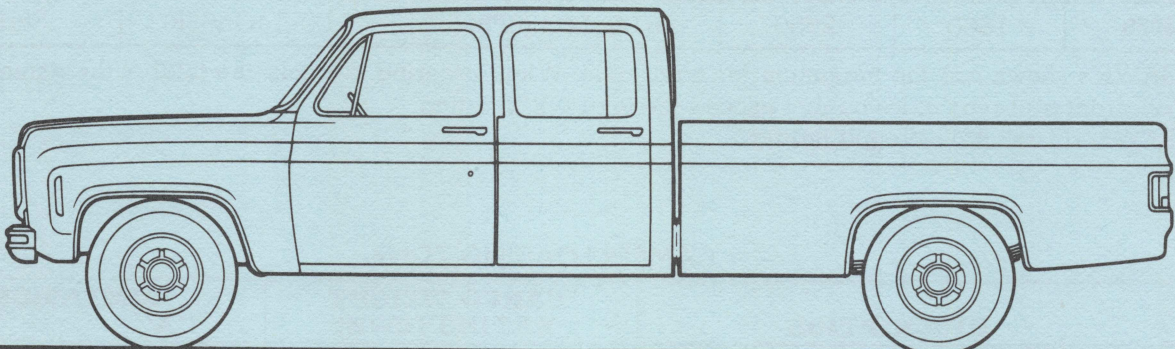

SERIES	MODEL NUMBER		BODY ORDERING CODE
	BONUS CAB	CREW CAB	8' FLEETSIDE BOX
C20	CC20943	CC20963	E63
C30	CC30943	CC30963	E63

PICKUP—Conventional Drive

C10 REGULAR CABS

STANDARD SPECIFICATIONS

Series	C10	C10/F44
Engine		
Base Equip.—6 cyl.	250 1-bbl. L6	250 1-bbl. L6
—8 cyl.	350 2-bbl V8	350 4-bbl. V8
Clutch—6 cyl.	11"; 124 sq. in.	11"; 124 sq. in.
—8 cyl.	11"; 124 sq. in.	12"; 150 sq. in.
Air Filter	Oiled-paper Element Throwaway type; 1-qt. Single; Aluminized Meet Government Requirements	
Oil Filter		
Exhaust System		
Emission Control Systems		
Suspension, Front	Independent; Coil Springs	
Capacity	3100 lb.	3400 lb.
Springs @ Ground—6 cyl.	1475 lb. ea.	1550 lb. ea.
—8 cyl.	1550 lb. ea.	1625 lb. ea.
Shock Absorbers	1" dia.	1" dia.
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	3750 lb.	
Axle Ratio	3.40	
Springs @ Ground	1550 lb. ea.	2000 lb. ea.
Shock Absorbers	1" dia.	1" dia.
Brakes	Hydraulic; Self-adjusting	
Front	Disc; 11.86" Rotor	
Rear	Drum; 11" x 2"	Drum; 11.15" x 2.75"
Booster	—	Dual Diaphragm
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—6 cyl.	2500 watts @ 0°F.	
—8 cyl.	3200 watts @ 0°F.	
Delcotron Generator	37 amp.	
Frame	Carbon Steel; 39,000 psi	
Section Modulus	3.14	
Fuel Tank (nominal capacity)		
—117.5" WB	16 gal.	
—131.5" WB	20 gal.	
Steering Gear Type	Manual; Recirculating Ball Gear	
Linkage	Parallelogram	
Transmission	Fully Synchronized 3-Speed	
Shift Location	Steering Column	
Tires	(5) G78-15B (4PR)	(5) L78-15B (4PR)
Wheels	(5) Disc 15" x 6"	

C20-30 REGULAR CABS STANDARD SPECIFICATIONS

Page 14

PICKUP—Conventional Drive

BONUS CAB & CREW CAB STANDARD SPECIFICATIONS

Series	C20 Bonus Cab	C20 Crew Cab	C30 Bonus/Crew Cab
Engine			
Base Equip—6 cyl.	292 1-bbl L6		
—8 cyl.	350 4-bbl V8		
Clutch—6 cyl.	11"; 124 sq. in.		
—8 cyl.	12"; 150 sq. in.		
Air Filter	Oiled-paper Element		
Oil Filter	Throwaway type; 1 qt.		
Exhaust System	Single; Aluminized		
Emission Control Systems	Meet Government Requirements		
Suspension, Front	Independent; Coil Springs		
Capacity	3800 lb.		4000 lb.
Springs @ Ground	1900 lb. ea.		2000 lb. ea.
Shock Absorbers	1" dia.		
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs		
Type	7500 lb.		
Axle Capacity	4.10		
Axle Ratio	2600 lb. ea.	2850 lb. ea.	3500 lb. ea.
Springs @ Ground	1" dia.		
Shock Absorbers	1.38" dia.		
Brakes	Hydraulic; Self-adjusting		
Front	Disc; 12.5" rotor		
Rear	Drum; 13" x 2.5"		13" x 3.5"
Booster	Dual Diaphragm		Hydro-Boost
Parking	Cable to Rear Wheels		
Electrical	12 Volt; Negative Ground		
Battery	3200 watts @ 0°F.		
Delcotron Generator	37 amp		
Frame	Carbon Steel; 39,000 psi		
Section Modulus	7.33		
Fuel Tank (Nominal Capacity)	20 gal.		
Steering Gear Type	Manual; Recirculating Ball Gear		
Linkage	Parallelogram		
Transmission	3-Speed	4-Speed CH 465	
Shift Location	Steering Column	Floor	
Tires—Front	(2) 8.75-16.5C (6PR)	(2) 9.50-16.5D (8PR)	(2) 9.50-16.5E (10PR)
—Rear	(2) 8.75-16.5D (8PR)	(2) 9.50-16.5D (8PR)	(2) 9.50-16.5E (10PR)
Wheels	(5) Disc		
Size	16.5" x 6.0"	16.5" x 6.75"	


PICKUP—4-Wheel Drive

STANDARD SPECIFICATIONS


Series	K10	K20
Engine		
Base Equip.—6 cyl.	250 1-bbl. L6	292 1-bbl. L6
—8 cyl.	350 4-bbl. V8	350 4-bbl. V8
Clutch—6 cyl.	11"; 124 sq. in.	11"; 124 sq. in.
—8 cyl.	12"; 150 sq. in.	12"; 150 sq. in.
Air Filter	Oiled-paper Element Throwaway type; 1-qt. Single; Aluminized Meet Government Requirements	
Oil Filter		
Exhaust System		
Emission Control Systems		
Suspension, Front	Salisbury Axle; Hypoid Drive; Single Stage 2-Leaf Springs	
Capacity	3600 lb.	3800 lb.
Axle Ratio—6 cyl.	4.11	4.56
—8 cyl.	3.07	4.10
Springs @ Ground	1850 lb. ea.	1850 lb. ea.
Shock Absorbers	1" dia.	1" dia.
Stabilizer Bar	1.25" dia.	1.25" dia.
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	3750 lb.	5700 lb.
Axle Ratio—6 cyl.	4.11	4.56
—8 cyl.	3.07	4.10
Springs @ Ground	2000 lb. ea.	2800 lb. ea.
Shock Absorbers	1" dia.	1" dia.
Brakes	Hydraulic—Self-adjusting	
Front	Disc; 11.86" Rotor	Disc; 12.5" Rotor
Rear	Drum; 11.15" x 2.75"	Drum; 11.15" x 2.75"
Booster	Dual Diaphragm	Dual Diaphragm
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—6 cyl.	2500 watts @ 0°F.	3200 watts @ 0°F.
—8 cyl.	3200 watts @ 0°F.	
Delcotron Generator	37 amp.	
Frame	Carbon Steel; 39,000 psi	
Section Modulus—117.5 WB	3.14	—
—131.5 WB	3.92	3.92
Fuel Tank (nominal capacity)		
—117.5" WB	16 gal.	—
—131.5" WB	20 gal.	20 gal.
Steering Gear Type	Manual; Recirculating Ball Gear	
Linkage	Parallelogram	
Transmission	Fully Synchronized 3-Speed	
Shift Location	Steering Column	
Transfer Case	New Process 205 2-Speed	
Shift Lever	Single Lever	
PTO Opening	Left Side	
Tires	(5) L78-15B (4PR)	(4) 8.75-16.5C (6PR)
Wheels	(5) Disc 15" x 6"	(5) Disc 16.5" x 6"

PICKUP

C10-30 SERIES FLEETSIDE PICKUP

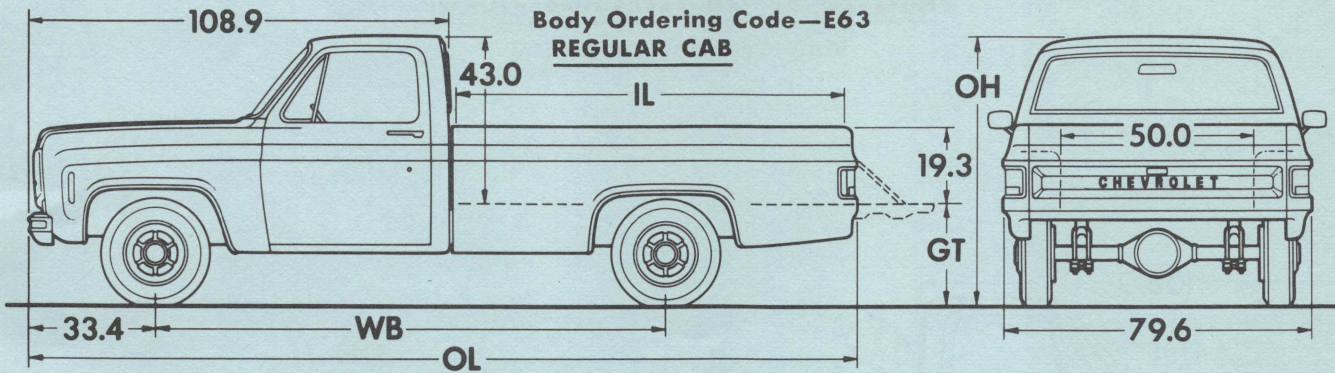

CREW CAB & BONUS CAB

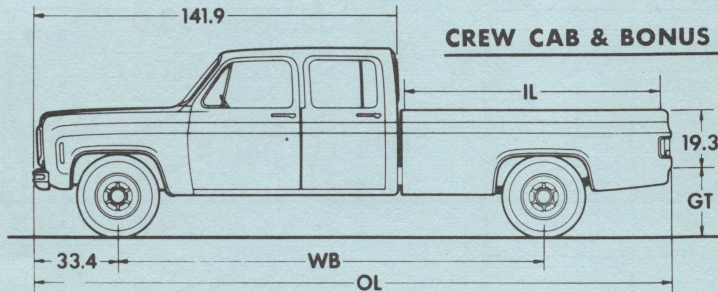

Series	Ground Clearance (in) ★	
	Front	Rear
C10	7.5	7.2
C20	8.0	7.8
C30	8.0	7.8

Model	Engine No. Cyl.	Dimensions (in) ★					Curb Weight (lb)			Model Weight (lb) *		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

C10 SERIES

CC10703	6	117.5	78.2	191.5	69.8	28.5	2177	1468	3645	2396	1699	4095
	8						2301	1492	3793	2520	1723	4243
CC10903	6	131.5	98.0	211.5	69.8	28.5	2255	1530	3785	2501	1734	4235
	8						2376	1549	3925	2622	1753	4375

C10/F44

CC10703	6	117.5	78.2	191.5	69.8	28.5	2193	1538	3731	2412	1769	4181
	8						2317	1562	3879	2536	1793	4329
CC10903	6	131.5	98.0	211.5	69.8	28.5	2271	1600	3871	2517	1804	4321
	8						2392	1619	4011	2638	1825	4461

C20 SERIES

CC20903	6	131.5	98.0	211.5	70.8	29.5	2379	1802	4181	2625	2006	4631
	8						2487	1827	4314	2733	2031	4764
CC20943 (Bonus Cab)	6	164.5	98.0	244.5	71.8	27.5	2549	2104	4653	2834	2269	5103
	8						2657	2129	4786	2942	2294	5236
CC20963 (Crew Cab)	6	165.4	98.0	244.5	71.8	27.5	2688	2224	4912	3168	2644	5812
	8						2783	2246	5029	3263	2666	5929

C30 SERIES


CC30903	6	131.5	98.0	211.5	71.0	30.0	2470	1888	4358	2716	2092	4808
	8						2562	1905	4467	2808	2109	4917
CC30943 (Bonus Cab)	6	164.5	98.0	244.5	72.0	28.5	2687	2208	4895	2972	2373	5345
	8						2779	2225	5004	3064	2390	5454
CC30963 (Crew Cab)	6	164.5	98.0	244.5	72.0	28.5	2720	2252	4972	3200	2672	5872
	8						2812	2269	5081	3292	2689	5981

★Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.). Total Model Weight may vary as much as ±150 lbs. to allow for production build variation.

PICKUP

K10-20 SERIES FLEETSIDE PICKUP

Body Ordering Code—E63

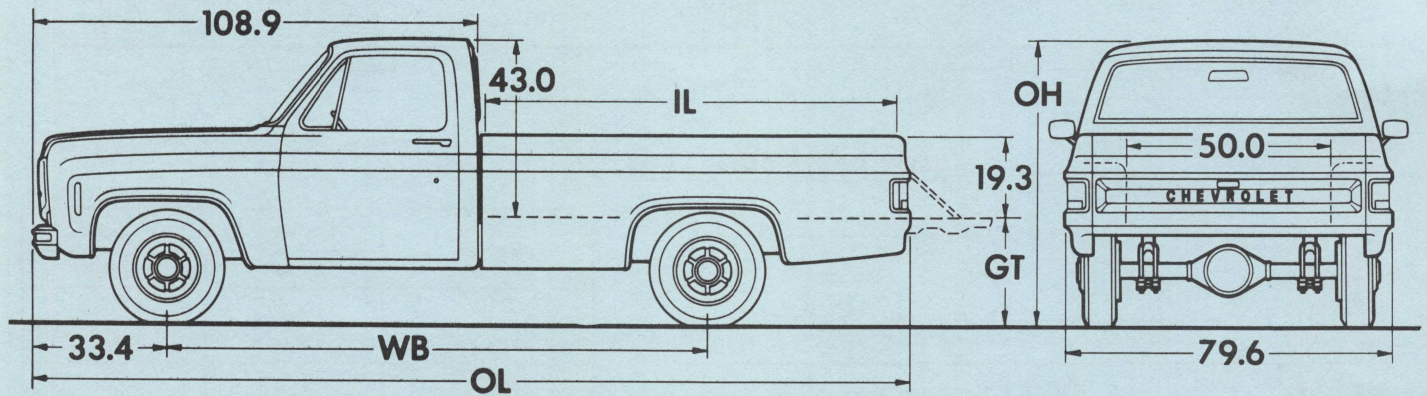

Series	Ground Clearance (in)★	
	Front	Rear
K10	7.2	7.0
K20	8.8	7.2

Model	Engine No. Cyl.	Dimensions (in)★					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

K10 SERIES


CK10703	6	117.5	78.2	192.2	72.0	30.0	2471	1618	4089	2690	1849	4539
	8						2606	1640	4246	2825	1871	4696
CK10903	6	131.5	98.0	212.0	72.0	30.0	2578	1683	4261	2824	1887	4711
	8						2710	1705	4415	2956	1909	4865

K20 SERIES

CK20903	6	131.5	98.0	212.0	74.0	33.0	2642	1870	4512	2888	2074	4962
	8						2767	1905	4673	3013	2109	5122

★Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x150 lb.). Total Model Weight may vary as much as ±150 lbs. to allow for production build variation.

Body Ordering Code—E62

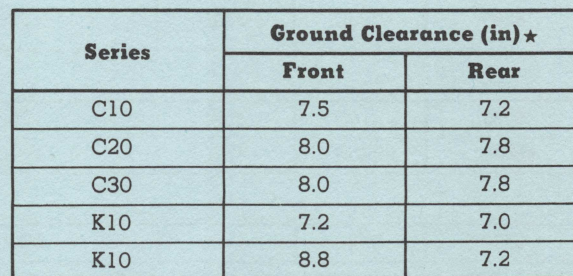

Model	Engine No. Cyl.	Dimensions (in)★					Curb Weight (lb)			Model Weight (lb)*		
		WB	IL	OL	OH	GT	Front	Rear	Total	Front	Rear	Total

CC10703	6 8	117.5	78.5	190.8	69.8	28.8	2188 2312	1389 1413	3577 3725	2407 2531	1620 1644	4027 4175
CC10903	6 8	131.5	98.2	210.5	69.8	28.8	2268 2389	1441 1460	3709 3849	2514 2635	1645 1664	4159 4299

CC10703	6 8	117.5	78.5	190.8	69.8	28.8	2204 2328	1459 1487	3663 3811	2423 2547	1690 1714	4113 4261
CC10903	6 8	131.5	98.2	210.5	69.8	28.8	2284 2405	1511 1530	3795 3935	2530 2651	1715 1734	4245 4385

CC20903	6	131.5	98.2	210.5	71.0	29.8	2392	1713	4105	2638	1917	4555
	8						2500	1738	4238	2746	1942	4688

CC30903	6	131.5	98.2	210.5	71.0	30.0	2466	2051	4317	2712	2055	4767
	8						2558	1868	4426	2804	2072	4876

CK10703	6 8	117.5	78.5	191.2	72.0	30.2	2482 2617	1539 1561	4021 4178	2701 2836	1770 1792	4471 4628
CK10903	6 8	131.5	98.2	211.2	72.0	30.2	2591 2729	1594 1610	4185 4339	2837 2969	1798 1820	4635 4789

CK20903	6	131.5	98.2	211.2	74.0	33.2	2655	1781	4436	2901	1985	4886
	8						2780	1816	4596	3026	2020	5046

Page 19

PICKUP

GVWR SELECTOR

GVW Rating (lbs)	†GAWR (lbs)		Minimum Equipment Required for GVW Rating		
	Front	Rear	Tire Capacity (lbs ea)		Chassis Equipment
			Front	Rear	

C10 SERIES

4900	2940	2940	1470	1470	Standard
5300	2940	2940	1470	1470	Power Brakes (J50)
5400	2950	★3100	1610	1610	
5600	2950	3440	1720	1720	HD Rear Springs (G50); Power Brakes (J50)

C10/F44

6050	★3100	3580	1790	1790	HD Chassis Equipment (F44)
■6200	★3250	3750	1900	1900	

K10 SERIES

6200	3520	3520	1760	1760	Standard
------	------	------	------	------	----------

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum individual capacity of either axle, springs or tires.

★3250 lb rating with 350 V8; 3400 lb rating with 454 V8.

■Requires 350 or 454 V8 engine.

FRONT AND REAR TIRE AVAILABILITY CHART

C-K10 SERIES

Spare tire to match either front or rear tires must be ordered
K10 models require matching front and rear tread

FRONT				REAR			
Capacity (lbs ea)	Description	Option Number		Capacity (lbs ea)	Description	Option Number	
		Highway	▲On-Off Road			Highway	On-Off Road

TUBELESS

1470	G78-15B	GS	—	1470	G78-15B	GS	GU
1470	G78-15B White Stripe	GT	—	1470	G78-15B White Stripe	GT	—
1610	H78-15B	HL	—	1610	H78-15B	HL	HR
1610	H78-15B White Stripe	HM	—	1610	H78-15B White Stripe	HM	—
1760	10-15B	—	WR	1760	10-15B	—	WR ♦
1790	L78-15B	LB	LC	1790	L78-15B	LB	LC
1790	L78-15B White Stripe	LD	—	1790	L78-15B White Stripe	LD	—
1900	L78-15C	LN●	—	1900	L78-15C	LN●	—
1900	L78-15C White Stripe	LP●	—	1900	L78-15C White Stripe	LP●	—
1900	LR78-15C Radial White Stripe	CD	—	1900	LR78-15C Radial White Stripe	CD	—

TUBE-TYPE

1610	6.50-16C (Truck Type)	MG	—	1610	6.50-16C (Truck Type)	MG	—
1720	7.00-15C (Truck Type)	NH	—	1720	7.00-15C (Truck Type)	NH	—
1800	7.00-16C (Truck Type)	NK	NL	1800	7.00-16C (Truck Type)	NK	NL

▲On-Off road front tires available on K10 models only.

●Available on C10 models only.

♦Available on K10 models only.

PICKUP

GVWR SELECTOR

GVW Rating (lbs)	†GAWR (lbs)		Minimum Equipment Required for GVW Rating		
	Front	Rear	Tire Capacity (lbs ea)		Chassis Equipment
			Front	Rear	

C20 SERIES REGULAR CAB

6400	3500	3980	1990	1990	Standard
7100	3500	4700	1990	2350	HD Rear Springs (G50)
7500	3500	5200	2780	2780	HD Rear Springs (G50); HD Power Brakes (J55)
8200	3800	5560	2780	2780	HD Front Springs (F60); 2850-lb ea Rear Springs (G51); HD Power Brakes (J55)

C20 SERIES BONUS CAB

7500	3800	4700	1990	2350	Standard
8200	3800	5560	2780	2780	2850-lb ea Rear Springs (G51); 4-Speed Transmission (M20) or Turbo Hydra-matic (M40)

C20 SERIES CREW CAB

8200	3800	5560	2780	2780	Standard
------	------	------	------	------	----------

K20 SERIES

6800	3700	3980	1990	1990	Standard
7500	3700	4700	1990	2350	HD Power Brakes (J55)
8400	3700	5500	2060	2750	

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum individual capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART

C-K20 SERIES

Spare tire to match either front or rear tires is available at extra cost

K20 models require matching front and rear tread

FRONT				REAR			
Capacity (lbs ea)	Description	Option Number		Capacity (lbs ea)	Description	Option Number	
		Highway	▲On-Off Road			Highway	On-Off Road

TUBELESS

1990	8.75-16.5C	TC	TB	1990	8.75-16.5C	TC	TB
2350	8.75-16.5D	TE	TF	2350	8.75-16.5D	TE	TF
2750	10-16.5D	—	WF	2750	10-16.5D	—	WF
2780	9.50-16.5D	UD	UE	2780	9.50-16.5D	UD	UE

TUBE-TYPE

2060	7.50-16C	PB	PC	2060	7.50-16C	PB	PC
				2440	7.50-16D	PF	PG
				2780	7.50-16E♦	PK●	PL●
2440	7.50-16D	PF	PG	2440	7.50-16D	PF	PG
2780	7.50-16E♦	PK	PL	2780	7.50-16E♦	PK	PL

▲On-Off road front tires available on K20 models only.
●Not available with 7.50-16C front tires on C20 models.

♦Not available on C20943 Bonus Cab models.

PICKUP

GVWR SELECTOR

GVW Rating (lbs)	†GAWR (lbs)		Minimum Equipment Required for GVW Rating			
	Front	Rear	Tire Capacity (lbs ea)		Chassis Equipment	
			Front	Rear		

C30 SERIES REGULAR CAB

6600	3500	3980	1990	1990	Standard
7400	3500	4700	1990	1990	HD Rear Springs (G50)
8200	3500	5560	2780	2780	3500-lb ea Rear Springs (G51)
9000	3800	6340	2780	3170	HD Front Springs (F60); 3500-lb ea Rear Springs (G51); HD Power Brakes (J55)
*10,000	3800	7000	1990	1750 (Duals)	Dual Rear Wheel Provisions (R05); HD Power Brakes (J55)

*Fleetside Pickups only.

C30 SERIES BONUS CAB AND CREW CAB

9000	4000	6340	3170	3170	Standard
9600	4000	6340	3170	3170	Camper Special Chassis Equipment (Z81/Z83)
*10,000	3980	7500	1990	2070 (Duals)	Dual Rear Wheel Provisions (R05)

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum individual capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART

C30 SERIES

Spare tire to match either front or rear tires is available at extra cost

FRONT					REAR		
Capacity (lbs ea)	Description	Option Number	Capacity (lbs ea)		Description	Option Number	
		Highway	Single	Dual		Highway	On-Off Road

TUBELESS

1990	8.75-16.5C	TC	1990	1750	8.75-16.5C	TC	TB
			2350	2070	8.75-16.5D	TE	TF
2350	8.75-16.5D	TE	2350	2070	8.75-16.5D	TE	TF
2780	9.50-16.5D	UD	2780	—	9.50-16.5D	UD	UE
			3170	—	9.50-16.5E	UG	—
3170	9.50-16.5E	UG	3170	—	9.50-16.5E	UG	—

TUBE-TYPE

2060	7.50-16C	PB	2060	1815	7.50-16C	PB	PC
			2440	2140	7.50-16D	PF	PG
2440	7.50-16D	PF	2440	2140	7.50-16D	PF	PG
2740	7.50-16E	PK	2740	—	7.50-16E	PK	PL

PICKUP

POWER TEAMS

ENGINE	TRANSMISSION	REAR AXLE	
Type and Code	Type and Code	Make and Capacity (lb)	Ratio and Code

C10 SERIES

			3.07 HE3	3.40 HE4	3.73 GT4	4.11 HO4
■ 250 1-bbl L6—LD4† (Standard Six)	3-Speed Manual (Std)—M15 a	Chevrolet 3750♦	—	X(Std)	X	—
	4-Speed (Chevrolet CH465)—M20		—	—	X(Std)	X
	Turbo Hydra-matic—M40		—	X(Std)	X	—
● 350 2-bbl V8—LF5 (Standard V8)	3-Speed Manual (Std)—M15		—	X(Std)	—	—
	Turbo Hydra-matic—M40		—	X(Std)	X	—
■ 350 4-bbl V8—LS9	3-Speed Manual (Std)—M15		—	X(Std)	X	—
	4-Speed (Chevrolet CH465)—M20		—	X(Std)	X	—
	Turbo Hydra-matic—M40		X(Std)	X	X	—
■ 454 4-bbl V8—LF8	Turbo Hydra-matic—M40		X(Std)	X	X	—

C20 SERIES REGULAR CAB

			3.21 HC8	3.73 GT4	4.10 GT5	4.56 HC4
● 292 1-bbl L6—L25 (Standard Six)	3-Speed Manual (Std)—M15 b	Chevrolet 5700♦	—	—	X(Std)	X
	4-Speed (Chevrolet CH465)—M20		—	—	X(Std)	X
	Turbo Hydra-matic—M40		—	—	X(Std)	X
■ 350 4-bbl V8—LS9 (Standard V8)	3-Speed Manual (Std)—M15		—	X(Std)	X	X
	4-Speed (Chevrolet CH465)—M20		—	X(Std)	X	X
	Turbo Hydra-matic—M40		—	X(Std)	X	X
■ 454 4-bbl V8—LF8	4-Speed (Chevrolet CH465)—M20		X	X(Std)	X	X
	Turbo Hydra-matic—M40		X	X(Std)	X	X

C20 SERIES BONUS CAB AND CREW CAB. C30 SERIES REGULAR-, BONUS-, AND CREW CABS

			3.73 GT4	4.10 GT5	4.56 HC4
● 292 1-bbl L6—L25 (Standard Six)	3-Speed Manual (Std)—M15 c	Chevrolet 7500♦d	—	X(Std)	X
	4-Speed (Chevrolet CH465) (Std)—M20		—	X(Std)	X
	Turbo Hydra-matic—M40		—	X(Std)	X
■ 350 4-bbl V8—LS9 (Standard V8)	3-Speed Manual (Std)—M15 c		X	X(Std)	X
	4-Speed (Chevrolet CH465) (Std)—M20		X	X(Std)	X
	Turbo Hydra-matic—M40		X	X(Std)	X
■ 454 4-bbl V8—LF8	4-Speed (Chevrolet CH465) (Std)—M20		X(Std)	X	X
	Turbo Hydra-matic—M40		X(Std)	X	X

■ Available for registration in the State of California when California Emission Certification is ordered.

● Not available for registration in the State of California.

♦ Locking Differential rear axle also available.

† Not available for registration in the State of California when 6050 lb GVWR is ordered.

a Not recommended for GVWR of 5300 lb or above.

b Not recommended for GVWR of 7100 lb or above.

c Only available on C20 Bonus Cab models and restricted to 7500 lb. GVWR.

d Dana 7500 lb rear axle used with Fleetside Pickup models with dual rear wheels.

ENGINE RATINGS (ALL PICKUPS)

See next page

PICKUP

POWER TEAMS

ENGINE	TRANSMISSION	TRANSFER CASE	REAR AXLE	
Type and Code	Type and Code	Make and Model	Make and Capacity (lb)	Ratio and Code

K10 SERIES

● 250 1-bbl L6—LD4 (Standard Six)	3-Speed Manual (Std)—M15 a	New Process #205	Chevrolet 3750 ♦	—	—	X(Std)
	4-Speed (Chevrolet CH465)—M20			—	X(Std)	X
	Turbo Hydra-matic—M40	New Process #203		—	X(Std)	X
■ 350 4-bbl V8—LS9 (Standard V8)	3-Speed Manual (Std)—M15	New Process #205		X(Std)	X	X
	4-Speed (Chevrolet CH465)—M20			X(Std)	X	X
	Turbo Hydra-matic—M40	New Process #203		X(Std)	X	X
■ 400 4-bbl V8—LF4	Turbo Hydra-matic—M40			X(Std)	X	X

K20 SERIES

K20 SERIES				4.10 GT5	4.56 HC4
■ 292 1-bbl L6—L25 (Standard Six)	3-Speed Manual (Std)—M15 b	New Process #205	Chevrolet 5700 ♦	—	X(Std)
	4-Speed (Chevrolet CH465)—M20			—	X(Std)
	Turbo Hydra-matic—M40	New Process #203		—	X(Std)
■ 350 4-bbl V8—LS9 (Standard V8)	3-Speed Manual (Std)—M15	New Process #205		X(Std)	—
	4-Speed (Chevrolet CH465)—M20			X(Std)	—
	Turbo Hydra-matic—M40	New Process #203		X(Std)	—
■ 400 4-bbl V8—LF4	Turbo Hydra-matic—M40			X(Std)	—

■ Available for registration in the State of California when California Emission Certification is ordered.

● Not available for registration in the State of California.

♦ Locking Differential rear axle also available.

a Not recommended.

b Not recommended for GVWR of 7500 lb or above.

ENGINE RATINGS (ALL PICKUPS)

Light Duty Emission Engines available on C10 Series only.

SAE Net Ratings @ 85°F	250 1-bbl L6*	250 1-bbl L6**	292 1-bbl L6	350 2-bbl V8
Net Horsepower	105 @ 3800 rpm	100 @ 3600 rpm	120 @ 3600 rpm	145 @ 3800 rpm
Net Torque, lb-ft	185 @ 1200 rpm	175 @ 1800 rpm	215 @ 2000 rpm	250 @ 2200 rpm

SAE Net Ratings @ 85°F	350 4-bbl V8	400 4-bbl V8	454 4-bbl V8*	454 4-bbl V8**
Net Horsepower	160 @ 3800 rpm	175 @ 3600 rpm	245 @ 3800 rpm	★240 @ 3800 rpm
Net Torque, lb-ft	250 @ 2400 rpm	290 @ 2800 rpm	365 @ 2800 rpm	▲370 @ 2800 rpm

*Light Duty Emissions.

**Heavy Duty Emissions.

★ 250 @ 3800 for California.

▲ 385 @ 2800 for California.

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price◇
POWER TEAMS AND AXLES					
<i>(See Power Teams Chart for availability and complete specifications)</i>					
Engines:					
<i>350-4 BBL V8.</i> V8 C10 series standard with F44 HD Chassis.					
With M20 4-speed transmission. Available only when J55 brakes are specified	4	0	LS9		
With M15 3-speed manual transmission or M40 Turbo Hydra-matic transmission	4	0	LS9		
<i>400-4 BBL V8.</i> V8 K10-20 series only. Available only when M40 Turbo Hydra-matic transmission is specified.	14	29	LF4		
<i>454-4 BBL V8.</i> V8 C10-20-30 series only. Includes N41 power steering and UA1 HD battery.					
C10 series only. Available only when M40 Turbo Hydra-matic transmission is specified. Includes 1700-lb capacity each front springs.					
Without F44 HD Chassis. Also available only when J55 brakes are specified	203	32	LF8		
With F44 HD Chassis	184	17	LF8		
C20 Regular Cab only. Available only when M20 4-speed transmission or M40 Turbo Hydra-matic transmission is specified	175	23	LF8		
Bonus Cab or C20 Crew Cab only.	183	31	LF8		
C30 series only.	186	36	LF8		
Liquid Petroleum Gas Conversion: All 1976 Chevrolet Light Duty Truck gasoline production engines may be converted to use LP Gas when permissible under Federal and State laws and regulations without causing harmful effect to the engine. Complete conversion to LPG requires adaptation by a local distributor who sells and services LPG equipment. Caution should be exercised so that the fuel tank is mounted on and is vented to the outside of the vehicle. In addition, vehicles converted to LPG should not be stored in enclosed places such as garages.					

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description	Added Weight (F) (R)		Option Number	Factory D&H ⁵	List Price	Mfr's Suggested Retail Price◇
POWER TEAMS AND AXLES						
(See Power Teams Chart for availability and complete specifications)						
Transmissions:						
Turbo Hydra-matic. Includes extra cooling on C-K20 or C30 series.						
With LD4 250-1 BBL engine.						
C10 series only.....	22	7	M40			
K10 series only.....	20	6	M40			
With L25 292-1 BBL engine.						
C20 series only.						
Regular Cab or Bonus Cab only.....	15	4	M40			
Crew Cab only.....	-46	-21	M40			
K20 series only.....	18	5	M40			
C30 series only.....	-32	-14	M40			
With LF5 350-2 BBL engine. C10 series only.....	17	7	M40			
With LS9 350-4 BBL or LF4 400-4 BBL engine.						
C10 series only.....	17	7	M40			
K10 series only.....	56	21	M40			
C20 series only.						
Regular Cab or Bonus Cab only.....	17	7	M40			
Crew Cab only.....	-44	-18	M40			
K20 series only.....	56	21	M40			
C30 series only.....	-26	-11	M40			
With LF8 454-4 BBL engine.						
C10 series only.....	22	8	M40			
C20 series only.						
Regular Cab or Bonus Cab only.....	29	11	M40			
Crew Cab only.....	-26	-11	M40			
C30 series only.....	-26	-11	M40			
Chevrolet 4-Speed. Standard on C20 Crew Cab or C30 series only.						
C10 series only. Not available when LF5 350-2 BBL or LF8 454-4 BBL engine is specified.						
With LD4 250-1 BBL engine.						
6 1/2-ft models only.....	78	21	M20			
8-ft models only.....	78	21	M20			
With LS9 350-4 BBL engine. Available only when J55 brakes are specified.						
6 1/2-ft models only.....	78	21	M20			
8-ft models only.....	78	21	M20			
K10 series only. Not available when LF4 400-4 BBL engine is specified.....	78	21	M20			
C20 Regular Cab or Bonus Cab only.....	78	21	M20			
K20 series only. Not available when LF4 400-4 BBL engine is specified.....	78	21	M20			
Axles, Rear:						
Optional Ratio. (See Power Teams Chart for option number selection, availability and complete specifications).....						
	0	0	...			
Heavy-Duty. 7500-lb capacity. Bonus Cab only. Available only when G51 springs are specified.....						
	0	7	G73			
Locking Differential. Not available on C30 series when R05 dual rear wheels are specified.						
C-K10 series only.....	0	3	G80			
C-K20 or C30 series only.....	0	7	G80			
Maximum Traction. C30 series only. Available only when R05 dual rear wheels are specified.....						
	0	7	G80			

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description	Added Weight (F) (R)	Option Number	Factory D&H [§]	List Price	Mfr's Suggested Retail Price ◇
MODEL OPTIONS					
(See Interior and Exterior Color Selection Charts)					
Cheyenne: Not available on Crew Cab, Bonus Cab or when YE9 Silverado is specified. Available in either custom cloth or custom vinyl seats. Includes V46 front bumper; bright front turn signals and front side marker lamp bezels; Cheyenne nameplate on fender and tailgate; bright windshield, rear window and cab back panel applique moldings; Z52 full-depth foam seat; color-keyed carpeting with bright sill plates; plastic door trim panels with storage pockets and wood-grained accents; Cheyenne nameplate on instrument panel; U37 cigarette lighter; headliner; C91 dome lamp; dual horns and special insulation.					
C10-20-30 Stepside only. Also includes N31 custom steering wheel and P03 hub caps.					
Without bucket seats	15	14			Z84
With bucket seats	16	15			Z84
C10-20-30 Fleetside only. Also includes tailgate lower molding applique and taillight moldings plus N31 custom steering wheel.					
Without R05 dual rear wheels. Also includes P03 hub caps and B85 body side upper moldings.					
Without bucket seats	15	14			Z84
With bucket seats	18	18			Z84
With R05 dual rear wheels.					
Without bucket seats	14	12			Z84
With bucket seats	13	9			Z84
K10-20 Stepside only. Also includes P03 hub caps.					
Without bucket seats	15	13			Z84
With bucket seats	16	14			Z84
K10-20 Fleetside only. Also includes tailgate lower molding applique, B85 body side upper and lower moldings, taillight moldings and P03 hub caps.					
Without bucket seats	17	17			Z84
With bucket seats	18	19			Z84
Scottsdale: Not available when Z84 Cheyenne, YE9 Silverado or bucket seats are specified. Includes bright rear window and windshield moldings; V46 front bumpers; bright turn signal and side marker lamp bezels; nameplates on front fenders and instrument panel; Z52 full-depth foam seat; bright sill plates; U37 cigarette lighter; plastic door trim panels with wood-grained accents; C91 dome lamp with bright bezel; dual horns; special insulation and color-keyed vinyl coated floor mats.					
Stepside. Also includes P03 hub caps.					
C10-20-30 Regular Cab only	6	6			Z62
K10-20 Regular Cab only	6	6			Z62
Fleetside. Also includes taillight moldings.					
Without R05 dual rear wheels. Also includes P03 hub caps and B84 body side spear moldings.					
C10-20-30 Regular Cab only	6	6			Z62
Bonus Cab only	21	21			Z62
C20-30 Crew Cab only	21	6			Z62
K10-20 Regular Cab only	6	6			Z62
With R05 dual rear wheels					
C30 Regular Cab only	6	6			Z62
C30 Crew Cab only	21	6			Z62

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Page 28

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description	Added Weight (F) (R)		Option Number	Factory D&H ⁵	List Price	Mfr's Suggested Retail Price◇
OTHER OPTIONS						
Air Cleaner: Poly-Wrap.....	0	0	K43			
Air Conditioning: All-Weather. Includes extra cooling and K76 61-amp generator. C-K10 series only. With LD4 250-1 BBL, LF5 350-2 BBL or LF8 454-4 BBL engine With LS9 350-4 BBL or LF4 400-4 BBL engine.....	90 94	9 11	C60 C60			
C20 series only. Without M40 Turbo Hydra-matic transmission..... With M40 Turbo Hydra-matic transmission.....	94 87	11 9	C60 C60			
C30 series only. Without M40 Turbo Hydra-matic transmission..... With M40 Turbo Hydra-matic transmission.....	89 84	10 9	C60 C60			
K20 series only. Without M40 Turbo Hydra-matic transmission..... With M40 Turbo Hydra-matic transmission.....	96 89	11 10	C60 C60			
Batteries: 12-volt, Delco Freedom Battery Auxiliary, 3500 watts 9-plate..... Heavy-Duty, 4000 watts, 15-plate. Included when Z82 Trailing Special, LF8 454-4 BBL engine or Z56 Cold-Climate Package is specified. Without LD4 250-1 BBL engine..... With LD4 250-1 BBL engine.....	51 2 14	-7 0 -2	TP2 UA1 UA1			
Brakes: Power. C10 series only..... Heavy-Duty Power. Standard on Crew Cab or Bonus Cab only. C10 series only. Included when F44 HD Chassis is specified. Includes J50 power brakes..... K10 series only. Standard with V8 engine. Available only when LD4 250-1 BBL engine is specified..... C-K20 Regular Cab only..... C30 Regular Cab only. Available only when F60 springs or R05 dual rear wheels are specified. Without R05 dual rear wheels..... With R05 dual rear wheels.....	18 22 22 9 44 44	2 14 14 43 20 128	J50 J55 J55 J55 J55 J55			
Bumper Equipment: Bumpers, Painted. Rear. Available with standard painted front bumper only. Not available when Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado is specified..... Rear Step..... Bumpers, Chromed. Front and Rear. Not available when Z84 Cheyenne or YE9 Silverado is specified..... Front. Not available when V38 painted rear bumper is specified. Included when Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado is specified..... Rear. Available only when Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado is specified..... Bumpers, Deluxe Chromed. With black insert. Front only..... Front and Rear..... Guards, Front Bumper. Chromed. Available only when V46 front bumpers, V37 front and rear bumpers, Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado is specified.....	-16 -31 -16 0 -16 2 2 11	56 108 56 0 56 0 2 -2	V38 V43 V37 V46 VF1 VG3 VE5 V31			
California Emission Certification: Includes all testing, equipment and /or certification necessary for registration in the State of California. (See Power Teams Chart for availability and complete specifications) K10 series with LD4 250-1 BBL engine or C10 series without F44 HD Chassis..... C10 series with F44 HD Chassis or K10 series with V8 engine . C20-30 or K20 series only.....	0 0 17	0 0 1	YF5 YF5 YF5			

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Page 30

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description	Added Weight (F) (R)	Option Number	Factory D&Hs	List Price	Mfr's Suggested Retail Price ◇
OTHER OPTIONS					
Carriers, Spare Wheel:					
<i>Side Mounted.</i>					
C-K10 series only.					
Fleetside only.					
C10 6 1/2-ft or K10 series only	1 -8	P13			
C10 8-ft series only	3 -10	P13			
Stepside only. Available only when optional exterior mirrors are specified.					
Without P03 hub caps, P01 wheel covers, P06 trim rings or N67 rally wheels.					
C10 series only.					
6 1/2-ft models only	1 2	P13			
8-ft models only	9 -9	P13			
K10 series only	0 -1	P13			
With P03 hub caps without P06 trim rings.					
C10 series only					
6 1/2-ft models only	1 2	P13			
8-ft models only	9 -9	P13			
K10 series only	0 -1	P13			
With P03 hub caps and P06 trim rings.					
C10 series only.					
6 1/2-ft models only	1 2	P13			
8-ft models only	9 -9	P13			
K10 series only	0 -1	P13			
With P01 wheel covers.					
C10 series only.					
Without MD or MG 6.50-16, NH or NG 7.00-15, NK or NL 7.00-16 tires					
6 1/2-ft models only	1 2	P13			
8-ft models only	9 -9	P13			
With MD or MG 6.50-16, NH or NG 7.00-15, NK or NL 7.00-16 tires					
6 1/2-ft models only	1 2	P13			
8-ft models only	9 -9	P13			
K10 series only	0 -1	P13			
With N67 rally wheels.					
C10 series only.					
6 1/2-ft models only	1 2	P13			
8-ft models only	9 -9	P13			
K10 series only	0 -1	P13			
C-K20 or C30 series only.					
Fleetside only.					
C-K20 series only	3 -10	P13			
C30 series only.					
With single rear tires	4 -16	P13			
With R05 dual rear wheels	1 2	P13			
Stepside only. Available only when optional exterior mirrors are specified.					
Without P03 hub caps, P01 wheel covers or P06 trim rings.					
C-K20 series only	9 -9	P13			
C30 series only	10 -15	P13			
With P03 hub caps without P06 trim rings.					
C-K20 series only	9 -9	P13			
C30 series only	10 -15	P13			
With P03 hub caps and P06 trim rings.					
C-K20 series only	9 -9	P13			
C30 series only	10 -15	P13			
With P01 wheel covers.					
C-K20 series only	9 -9	P13			
C30 series only	10 -15	P13			
<i>Under Frame. C30 series only. Available only when R05 dual rear wheels are specified.</i>					
	-3 18	P10			
<i>Glide-Out Spare Tire</i>	0 0	P11			
Clock, Electric: Not available when U16 tachometer is specified.					
Without YE9 Silverado. Includes Z53 voltmeter, temperature and oil pressure gauges.					
	1 0	U35			
With YE9 Silverado	0 0	U35			

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price◇
OTHER OPTIONS					
Cold-Climate Package: Not available when C60 air conditioning or K79 42-amp generator is specified. Includes 55-amp generator, special insulation, super heater and defroster, engine block heater, anti-freeze protection to -40 degrees and UA1 HD battery without Z82 Trailing Special or LF8 454-4 BBL engine.					
Without Z84 Cheyenne, YE9 Silverado, Z62 Scottsdale or bucket seats.					
C-K10 series with LD4 250-1 BBL engine	16 -2	Z56			
C-K10-20 series without LD4 250-1 BBL or LF8 454-4 BBL engine.					
Without Z82 Trailing Special.	5 3	Z56			
With Z82 Trailing Special	5 3	Z56			
C10-20 with LF8 454-4 BBL engine.					
Without Z82 Trailing Special	5 3	Z56			
With Z82 Trailing Special	5 3	Z56			
C30 series without LF8 454-4 BBL engine.					
Without R05 dual rear wheels or Z82 Trailing Special .	5 3	Z56			
With Z82 Trailing Special	5 3	Z56			
With R05 dual rear wheels.	5 3	Z56			
C30 with LF8 454-4 BBL engine.					
Without R05 dual rear wheels or Z82 Trailing Special .	5 3	Z56			
With Z82 Trailing Special	5 3	Z56			
With R05 dual rear wheels.	5 3	Z56			
With Z84 Cheyenne, YE9 Silverado, Z62 Scottsdale or bucket seats.					
C-K10 series with LD4 250-1 BBL engine	16 -2	Z56			
C-K10-20 series without LD4 250-1 BBL or LF8 454-4 BBL engine.					
Without Z82 Trailing Special.	5 3	Z56			
With Z82 Trailing Special	5 3	Z56			
C10-20 with LF8 454-4 BBL engine.	5 3	Z56			
C30 series without LF8 454-4 BBL engine.					
Without R05 dual rear wheels or Z82 Trailing Special .	5 3	Z56			
With Z82 Trailing Special	5 3	Z56			
With R05 dual rear wheels.	5 3	Z56			
C30 with LF8 454-4 BBL engine.					
Without R05 dual rear wheels or Z82 Trailing Special .	5 3	Z56			
With R05 dual rear wheels.	5 3	Z56			
Cooler, Engine Oil: Recommended for heavy duty trailering. Available only when V8 engine is specified	9 -1	KC4			
Cooling: Radiator, Heavy-Duty. Not available when C60 air conditioning or LF4 400-4 BBL engine is specified.					
C-K10 series only.					
With LD4 250-1 BBL engine or LF8 454-4 BBL engine	4 -1	V01			
With LF5 350-2 BBL engine, LS9 350-4 BBL engine or LF4 400-4 BBL engine.	8 -1	V01			
C20-30 or K20 series only. Not available when M40 Turbo Hydraulic transmission is specified.					
Without LF8 454-4 BBL engine	6 -1	V01			
With LF8 454-4 BBL engine.	4 -1	V01			
Exhaust System Noise Regulator:					
With LF5 350-2 BBL or LS9 350-4 BBL engine.	0 0	NB9			
Floor, Pickup Box: 8-ft. Wood with steel skid strips. 8-ft Fleetside only. Not available when Z83 Deluxe Camper Group is specified.	3 3	E81			
Gauges:					
Voltmeter Temperature and Oil Pressure. Included when YE9 Silverado, U35 clock or U16 tachometer is specified.	1 0	Z53			
Tachometer. Available only when V8 engine is specified. Not available when U35 electric clock is specified.					
Without YE9 Silverado. Includes Z53 voltmeter, temperature and oil pressure gauges.	2 0	U16			
With YE9 Silverado.	1 0	U16			

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Page 33

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description	Added Weight		Option Number	Factory D&H's	List Price	Mfr's Suggested
	(F)	(R)				Retail Price ◇

OTHER OPTIONS

Moldings:

Body Side Spear. Bright with black insert. Fleetside only. Not available when Z84 Cheyenne, YE9 Silverado, R05 dual rear wheels, YG1 or B85 body side moldings,

ZY3 special two-tone or ZY4 deluxe two-tone paint is specified. Included when Z62 Scottsdale is specified. Includes fender, door cab panel, tailgate and pickup box moldings

0 0 B84

Body Side Upper. Fleetside only. Not available when YG1 body side upper and lower moldings, R05 dual rear wheels, YE9 Silverado or YG2 wood-grained exterior trim is specified. Included when Z84 Cheyenne is specified. Includes fender, door cab panel, tailgate and pickup box moldings plus bright front turn signal, front side marker and taillight trim

Without Z62 Scottsdale

2 3 B85

With Z62 Scottsdale

0 0 B85

Body Side Upper and Lower. Fleetside only. Included when YE9 Silverado is specified.

Without Z84 Cheyenne or Z62 Scottsdale. Includes fender, door cab panel, tailgate, pickup box and front fender wheel opening moldings plus bright front turn signal, front side marker and taillight trim.

With single rear wheels. Also includes rear fender wheel opening moldings

3 4 YG1

With R05 dual rear wheels.

3 4 YG1

With Z84 Cheyenne. Includes lower body side, tailgate and front fender wheel opening moldings.

With single rear wheels. Also includes rear fender wheel opening moldings

3 4 YG1

With R05 dual rear wheels.

3 4 YG1

With Z62 Scottsdale. Includes fender, door cab panel, tailgate, pickup box and front fender wheel opening moldings.

With single rear wheels. Also includes rear fender wheel opening moldings

3 4 YG1

With R05 dual rear wheels.

3 4 YG1

Paints, Exterior: See Interior and Exterior Color Selection Chart for ordering information

Solid.

0 0 ZY1

Conventional Two-Tone. With secondary color.

Regular Cab only.

Without Z84 Cheyenne or YE9 Silverado. Includes cab back panel applique moldings.

0 1 ZY2

With Z84 Cheyenne or YE9 Silverado.

0 0 ZY2

Bonus Cab or Crew Cab only.

Without YE9 Silverado. Includes cab back panel applique moldings

0 1 ZY2

With YE9 Silverado.

0 0 ZY2

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

OTHER OPTIONS

Paints, Exterior: (Continued)

Regular Cab only.

Without R05 dual rear wheels. Also includes rear fender wheel opening moldings
With R05 dual rear wheels

Without R05 dual rear wheels. Also includes rear fender wheel opening moldings

With R05 dual rear wheels. Also includes YG1 body side upper and lower moldings.

With Z84 Cheyenne. Includes lower body side, tailgate and front fender wheel opening moldings.

Without R05 dual rear wheels. Also includes rear fender wheel opening moldings

With R05 dual rear wheels. Also includes YG1 body side upper and lower moldings.

Bonus Cab or Crew Cab only

Without Z62 Scottsdale or YE9 Silverado. Includes YG1 body side upper and lower moldings plus cab back panel applique moldings.

Without R05 dual rear wheels. Also includes rear fender wheel opening moldings

With R05 dual rear wheels. Also includes YG1 body side upper and lower moldings.

With Z62 Scottsdale. Includes fender, door cab panel, tailgate, pickup box and front fender wheel opening moldings.

Without R05 dual rear wheels. Also includes rear fender wheel opening moldings

With R05 dual rear wheels. Also includes YG1 body side upper and lower moldings.

With YE9 Silverado.

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price◇
OTHER OPTIONS					
Paints, Exterior: (Continued)					
<i>Deluxe Two-Tone.</i> Fleetside only. Cab roof and area between upper and lower side moldings painted secondary color.					
Regular Cab only.					
Without Z62 Scottsdale, YE9 Silverado or Z84 Cheyenne. Includes YG1 body side upper and lower moldings plus cab back panel applique moldings.					
Without R05 dual rear wheels. Also includes rear fender wheel opening moldings	3	5	ZY4		
With R05 dual rear wheels	3	5	ZY4		
With Z62 Scottsdale. Includes fender, door cab panel, tailgate, pickup box and front fender wheel opening moldings.					
Without R05 dual rear wheels. Also includes rear fender wheel opening moldings	3	5	ZY4		
With R05 dual rear wheels. Also includes YG1 body side upper and lower moldings.	3	5	ZY4		
With YE9 Silverado.	0	0	ZY4		
With Z84 Cheyenne. Includes lower body side, tailgate and front fender wheel opening moldings.					
Without R05 dual rear wheels. Also includes rear fender wheel opening moldings	3	5	ZY4		
With R05 dual rear wheels. Also includes YG1 body side upper and lower moldings.	3	5	ZY4		
Bonus Cab or Crew Cab only					
Without Z62 Scottsdale or YE9 Silverado. Includes YG1 body side upper and lower moldings plus cab back panel applique moldings.					
Without R05 dual rear wheels. Also includes rear fender wheel opening moldings	3	5	ZY4		
With R05 dual rear wheels	3	5	ZY4		
With Z62 Scottsdale. Includes fender, door cab panel, tailgate, pickup box and front fender wheel opening moldings.					
Without R05 dual rear wheels. Also includes rear fender wheel opening moldings	3	5	ZY4		
With R05 dual rear wheels. Also includes YG1 body side upper and lower moldings.	3	5	ZY4		
With YE9 Silverado.	0	0	ZY4		
Plate: Serial Number (State of Pennsylvania) "K" Plate. Not required on Bonus Cab or C20 Crew Cab only. C10 series available only when J50 or J55 brakes are specified. C20 Regular Cab available only when J55 brakes, G50 or G51 rear springs and WD or WF 10.00-16.5 /D or larger tires are specified. C30 Regular Cab available only when J55 brakes and 2750-lb or larger capacity tires are specified. K20 series available only when J55 brakes, F58 HD front stabilizer and PF or PG 7.50-16 /D or larger tires are specified. Not available on K10 series.	0	0	Z55		
Plate, Fuel Tank Shield:					
C10-20-30 Regular Cab only.					
Without NL2 auxiliary fuel tank	20	25	NY1		
With NL2 auxiliary fuel tank	40	50	NY1		
K10-20 series only. K10 series available only when V8 engine is specified. Includes protective shield plate on transfer case.					
Without NL2 auxiliary fuel tank	20	25	NY1		
With NL2 auxiliary fuel tank	40	50	NY1		
Bonus Cab or Crew Cab only.					
Without NL2 auxiliary fuel tank	16	29	NY1		
With NL2 auxiliary fuel tank	32	58	NY1		
Radios: Pushbutton. Includes antenna.					
AM	7	2	U63		
AM /FM	7	2	U69		

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Page 37

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description	Added Weight (F) (R)	Option Number	Factory D&H ^s	List Price	Mfr's Suggested Retail Price ♦
OTHER OPTIONS					
Springs:					
<i>Front, Heavy-Duty.</i> Standard on Bonus Cab or Crew Cab. Not available when LF8 454-4 BBL engine is specified.					
Capacity 1550-lb each. C10 series only. Available only when LD4 250-1 BBL engine is specified.	12 0	F60			
Capacity 1625-lb each. C10 series only. Available only when LF5 350-2 BBL engine or LS9 350-4 BBL engine is specified.	12 0	F60			
Included when F44 HD Chassis is specified					
Capacity 1900-lb each. Included when Z81 or Z83 Camper Special Chassis Equipment is specified.	24 0	F60			
K10-20 series only	2 0	F60			
C20 series only					
Capacity 1900-lb each. C30 series only. Included when Z81 or Z83 Camper Special Chassis Equipment or R05 dual rear wheels are specified.	-3 0	F60			
<i>Rear, Heavy-Duty.</i> Not available on Bonus Cab, Crew Cab or K20 series.					
Capacity 2000-lb each, two-stage. C10 series only. Included when F44 HD Chassis is specified.	0 64	G50			
Capacity 2600-lb each, two-stage. C20 series only. Not available when Z81 or Z83 Camper Special Chassis Equipment is specified.	0 26	G50			
Capacity 2850-lb each. C30 series only. Not available when Z81 or Z83 Camper Special Chassis Equipment or R05 dual rear wheels are specified.	0 38	G50			
<i>Rear, Extra Capacity.</i> C20-30 series only. Standard on Crew Cab only. Not available when R05 dual rear wheels are specified. Included when Z81 or Z83 Camper Special Chassis Equipment is specified with single rear wheels.					
Capacity 2850-lb each. C20 series only					
Regular Cab only	0 38	G51			
Bonus Cab only	0 38	G51			
Capacity 3500-lb each. C30 series only	0 38	G51			
<i>Rear, Main and Auxiliary.</i> Capacity 3750-lb each. C30 series only. Included when Z81 or Z83 Camper Special Chassis Equipment is specified with R05 dual rear wheels.					
Regular Cab only	0 62	G60			
Bonus Cab or Crew Cab only	0 24	G60			
Stabilizers:					
<i>Front.</i> 1" diameter. Not available on K10-20 series or when Z81 or Z83 Camper Special Chassis Equipment is specified.					
	19 0	F59			
<i>Front, Heavy-Duty.</i> 1.25" diameter. C20-30 series only. Standard on V8 K10-20 series. Not available on C10 series. Included when Z81 or Z83 Camper Special Chassis Equipment is specified.					
	23 0	F58			
Steering, Power: Included when Z82 Trailering Special or LF8 454-4 BBL engine is specified.					
C10-20-30 series only.					
Without LD4 250-1 BBL engine	29 0	N41			
With LD4 250-1 BBL engine	35 0	N41			
K10-20 series only.	33 0	N41			
Steering Wheels:					
<i>Comfortilt.</i> Not available when M15 3-speed manual transmission is specified.					
With M40 Turbo Hydra-matic transmission	2 0	N33			
With M20 4-speed transmission	3 1	N33			
<i>Custom.</i>					
C10-20-30 series only. Included when Z84 Cheyenne or YE9 Silverado is specified	0 0	N31			
K10-20 series only. Available only when N41 power steering is specified. Includes 16" steering wheel	0 0	N31			

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price◇
OTHER OPTIONS					
Tank, Fuel: <i>Auxiliary.</i> LH Frame Mounted. Approximately 16-gallon capacity. C10 series available only when F44 HD Chassis is specified. K10-20 series not available when V8 engine and M40 Turbo Hydra-matic transmission are specified. Also not available on K10 series when LD4 250-1 BBL engine is specified.					
6 1/2-ft models only.....	71 88	NL2			
8-ft Regular Cab.....	84 103	NL2			
Bonus Cab or Crew Cab only.....	65 122	NL2			
Tires and Wheels: See following pages					
Towing Device: Two front towing hooks. K10-20 series only .	16 -3	V76			
Trailer Hitch: <i>Weight Distributing Platform Type.</i> Not available on CK10703. C-K10-20 series available only when P13 side mounted spare wheel carrier and VF1 or V38 bumpers are specified. CC10703 available only when G50 springs are specified. C30 series available only when P13 side mounted spare wheel carrier and VF1 or V38 bumpers are specified.					
Regular Cab only.....	-19 71	VR4			
Bonus Cab or Crew Cab only.....	-16 68	VR4			
Trailer Hitch Balls. Available only when V43 rear step bumper is specified.					
1 1/8" diameter.....	-1 2	VR5			
2" diameter.....	-1 2	VR6			
Trailer Special: Available only when V8 engine, M20 4-speed or M40 Turbo Hydra-matic transmission and K76 61-amp generator or C60 air conditioning is specified. LF5 350-2 BBL engine requires M40 Turbo Hydra-matic transmission. Not available when Z81 or Z83 Camper Special Chassis Equipment is specified. Includes trailering special emblem. Also includes UA1 HD battery and N41 power steering without LF8 454-4 BBL engine and trailering special emblem. <i>See Chart A on the Trailering Special Package pages for Pickup, under the Recreational Vehicles Tab, for GVW ratings with available power team combinations.</i>					
C10 series only. Available only when J50 or J55 power brakes, G50 HD rear springs, LB or LC L78-15 or larger tubeless tires and V01 HD radiator without C60 air conditioning are specified.					
With LF5 350-2 BBL or LS9 350-4 BBL. Also requires F60 HD front spring.....	31 0	Z82			
With LF8 454-4 BBL engine.....	0 0	Z82			
C20-30 series only. Available only when V01 HD radiator without C60 air conditioning or M40 Turbo Hydra-matic transmission is specified.					
Without LF8 454-4 BBL engine.....	31 0	Z82			
With LF8 454-4 BBL engine.....	0 0	Z82			
K10 series only. Available only when V01 HD radiator without C60 air conditioning or LF4 400-4 BBL engine is specified.					
.....	35 0	Z82			
K20 series only. Available only when V01 HD radiator without C60 air conditioning or M40 Turbo Hydra-matic transmission is specified.					
.....	35 0	Z82			
Wheel Trim: Bright Metal.					
Hub Caps. Not available when R05 dual rear wheels are specified. Included when Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado is specified.					
C10-20-30 series only.....	0 1	P03			
K10-20 series only.....	2 3	P03			
Trim Rings. Available only when Z62 Scottsdale, Z84 Cheyenne, YE9 Silverado or P03 hub caps are specified. Not available when R05 dual rear wheels or 7.50-16 tube-type tires are specified. Included when N67 rally wheels are specified.					
.....	2 3	P06			

PICKUP

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description	Added Weight (F) (R)		Option Number	Factory D&H's	List Price	Mfr's Suggested
						Retail Price◇

OTHER OPTIONS

Wheel Trim: (Continued)

Wheel Covers. Not available on K20 series. C-K10 series not available when CD LR78-15 or WR 10-15 tires are specified.

C10 series only.

Without Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado.

Without MG or MD 6.50-16 or NK or NL 7.00-16 tires. 4 6 P01

With MG or MD 6.50-16 or NK or NL 7.00-16 tires. Includes P06 trim rings 6 9 P01

With Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado.

Without MG or MD 6.50-16 or NK or NL 7.00-16 tires. 4 6 P01

With MG or MD 6.50-16 or NK or NL 7.00-16 tires. Includes P06 trim rings 6 9 P01

C20 series only. Not available when WD or WF 10.00-16.5 /D tires are specified. Includes P06 trim rings.

Without Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado 7 10 P01

With Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado 7 10 P01

C30 Regular Cab only. Not available when WD or WF 10.00-16.5 /D tires are specified.

With single rear wheels. Includes P06 trim rings.

Without Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado 7 10 P01

With Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado 7 10 P01

With R05 dual rear wheels. 5 5 P01

C30 Crew Cab only.

With single rear wheels. Includes P06 trim rings.

Without Z62 Scottsdale or YE9 Silverado 7 10 P01

With Z62 Scottsdale or YE9 Silverado. 7 10 P01

K10 series only. Not available when F76 hubs are specified.

Without Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado. Without MG or MD 6.50-16, NK or NL 7.00-16 or WR 10-15 tires 6 9 P01

With MG or MD 6.50-16, NK or NL 7.00-16 or WR 10-15 tires. Includes P06 trim rings 8 12 P01

With Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado.

Without MG or MD 6.50-16, NK or NL 7.00-16 or WR 10-15 tires 6 9 P01

With MG or MD 6.50-16, NK or NL 7.00-16 or WR 10-15 tires. Includes P06 trim rings 8 12 P01

Wheel Covers, Deluxe. C10 Fleetside series only. Not available when MG or MD 6.50-16, NK or NL 7.00-16 tube-type tires are specified.

Without Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado.

Without P13 side mounted spare wheel carrier. 1 1 PA1

With P13 side mounted spare wheel carrier. 1 2 PA1

With Z62 Scottsdale, Z84 Cheyenne or YE9 Silverado.

Without P13 side mounted spare wheel carrier. 1 1 PA1

With P13 side mounted spare wheel carrier. 1 2 PA1

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Page 41

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price ♦
----------------	-----------------------------------	----------------------	---------------	---------------	------------	--------------------------------

C10 SERIES

TUBELESS TIRES USED WITH SINGLE REAR WHEELS

G78-15 /B Passenger Type. Maximum Tire Capacity (Each)— Front (1470) Rear (1470)
Not available when F44 HD Chassis is specified.

Highway Bias Belted Ply Blackwall

Front (Standard)	6.00	0	0	XGS
Rear (Standard)	6.00	0	0	YGS
Spare (Standard)				
With under frame mounted spare wheel carrier	6.00	0	0	ZGS
With P13 side mounted spare wheel carrier	6.00	24	-24	ZGS

Highway Bias Belted Ply White Stripe

Front	6.00	0	0	XGT
Rear	6.00	0	0	YGT
Spare				
With under frame mounted spare wheel carrier	6.00	0	0	ZGT
With P13 side mounted spare wheel carrier	6.00	24	-24	ZGT

On-Off Road Bias Belted Ply Blackwall

Rear	6.00	0	5	YGU
Spare				
With under frame mounted spare wheel carrier	6.00	-1	4	ZGU
With P13 side mounted spare wheel carrier	6.00	25	-22	ZGU

H78-15 /B Passenger Type. Maximum Tire Capacity (Each)— Front (1610) Rear (1610)
Not available when F44 HD Chassis is specified.

Highway Bias Belted Ply Blackwall

Front	6.00	5	0	XHL
Rear	6.00	0	5	YHL
Spare				
With under frame mounted spare wheel carrier	6.00	-1	4	ZHL
With P13 side mounted spare wheel carrier	6.00	25	-22	ZHL

Highway Bias Belted Ply White Stripe

Front	6.00	5	0	XHM
Rear	6.00	0	5	YHM
Spare				
With under frame mounted spare wheel carrier	6.00	-1	4	ZHM
With P13 side mounted spare wheel carrier	6.00	25	-22	ZHM

On-Off Road Bias Belted Ply Blackwall

Rear	6.00	0	10	YHR
Spare				
With under frame mounted spare wheel carrier	6.00	-1	6	ZHR
With P13 side mounted spare wheel carrier	6.00	25	-20	ZHR

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price ◇
C10 SERIES						
TUBELESS TIRES USED WITH SINGLE REAR WHEELS						
L78-15 /B Passenger Type. Maximum Tire Capacity (Each)— Front (1790) Rear (1790)						
<i>Not available when F44 HD Chassis and V8 engine are specified.</i>						
Highway Bias Belted Ply Blackwall						
Front						
Without F44 HD Chassis	6.00	9 0	XLB			
With F44 HD Chassis (Standard)	6.00	0 0	XLB			
Rear						
Without F44 HD Chassis	6.00	0 9	YLB			
With F44 HD Chassis (Standard)	6.00	0 0	YLB			
Spare						
With under frame mounted spare wheel carrier						
Without F44 HD Chassis	6.00	-1 5	ZLB			
With F44 HD Chassis (Standard)	6.00	0 0	ZLB			
With P13 side mounted spare wheel carrier						
Without F44 HD Chassis	6.00	25 -21	ZLB			
With F44 HD Chassis (Standard)	6.00	0 0	ZLB			
Highway Bias Belted Ply White Stripe						
Front						
Without F44 HD Chassis	6.00	10 0	XLD			
With F44 HD Chassis	6.00	10 0	XLD			
Rear						
Without F44 HD Chassis	6.00	0 10	YLD			
With F44 HD Chassis	6.00	0 10	YLD			
Spare						
With under frame mounted spare wheel carrier						
Without F44 HD Chassis	6.00	-1 6	ZLD			
With F44 HD Chassis	6.00	-1 6	ZLD			
With P13 side mounted spare wheel carrier						
Without F44 HD Chassis	6.00	25 -20	ZLD			
With F44 HD Chassis	6.00	25 -20	ZLD			
On-Off Road Bias Belted Ply Blackwall						
Rear						
Without F44 HD Chassis	6.00	0 13	YLC			
With F44 HD Chassis	6.00	0 13	YLC			
Spare						
With under frame mounted spare wheel carrier						
Without F44 HD Chassis	6.00	-2 9	ZLC			
With F44 HD Chassis	6.00	-2 9	ZLC			
With P13 side mounted spare wheel carrier						
Without F44 HD Chassis	6.00	26 -19	ZLC			
With F44 HD Chassis	6.00	26 -19	ZLC			

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Model Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price◇
C10 SERIES						
TUBELESS TIRES USED WITH SINGLE REAR WHEELS						
L78-15 /C Passenger Type. Maximum Tire Capacity (Each)—Front (1900) Rear (1900)						
Highway Bias Belted Ply Blackwall						
Front						
Without F44 HD Chassis	6.00	8 0	XLN			
With F44 HD Chassis						
With 6-cylinder engine	6.00	8 0	XLN			
With V8 engine	6.00	8 0	XLN			
Rear						
Without F44 HD Chassis	6.00	0 8	YLN			
With F44 HD Chassis						
With 6-cylinder engine	6.00	0 8	YLN			
With V8 engine	6.00	0 8	YLN			
Spare						
With under frame mounted spare wheel carrier						
Without F44 HD Chassis	6.00	-1 5	ZLN			
With F44 HD Chassis						
With 6-cylinder engine	6.00	-1 5	ZLN			
With V8 engine	6.00	-1 5	ZLN			
With P13 side mounted spare wheel carrier						
Without F44 HD Chassis	6.00	25 -21	ZLN			
With F44 HD Chassis						
With 6-cylinder engine	6.00	25 -21	ZLN			
With V8 engine	6.00	25 -21	ZLN			
Highway Bias Belted Ply White Stripe						
Front						
Without F44 HD Chassis	6.00	10 0	XLP			
With F44 HD Chassis						
With 6-cylinder engine	6.00	10 0	YLP			
With V8 engine	6.00	10 0	XLP			
Rear						
Without F44 HD Chassis	6.00	0 10	YLP			
With F44 HD Chassis						
With 6-cylinder engine	6.00	0 10	YLP			
With V8 engine	6.00	0 10	YLP			
Spare						
With under frame mounted spare wheel carrier						
Without F44 HD Chassis	6.00	-1 6	ZLP			
With F44 HD Chassis						
With 6-cylinder engine	6.00	-1 6	ZLP			
With V8 engine	6.00	-1 6	ZLP			
With P13 side mounted spare wheel carrier						
Without F44 HD Chassis	6.00	25 -20	ZLP			
With F44 HD Chassis						
With 6-cylinder engine	6.00	25 -20	ZLP			
With V8 engine	6.00	25 -20	ZLP			

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price◇
----------------	-----------------------------------	----------------------	---------------	---------------	------------	-------------------------------

C10 SERIES

TUBELESS TIRES USED WITH SINGLE REAR WHEELS

LR78-15 /C Passenger Type. Maximum Tire Capacity (Each)—Front (1900) Rear (1900)

Highway Steel Belted Radial Ply White Stripe

Front

Without F44 HD Chassis	6.00	14	0	XCD
With F44 HD Chassis				
With 6-cylinder engine	6.00	14	0	XCD
With V8 engine	6.00	14	0	XCD

Rear

Without F44 HD Chassis	6.00	0	14	YCD
With F44 HD Chassis				
With 6-cylinder engine	6.00	0	14	YCD
With V8 engine	6.00	0	14	YCD

Spare

With under frame mounted spare wheel carrier				
Without F44 HD Chassis	6.00	-2	9	ZCD
With F44 HD Chassis				
With 6-cylinder engine	6.00	-2	9	ZCD
With V8 engine	6.00	-2	9	ZCD
With P13 side mounted spare wheel carrier				
Without F44 HD Chassis	6.00	27	-20	ZCD
With F44 HD Chassis				
With 6-cylinder engine	6.00	27	-20	ZCD
With V8 engine	6.00	27	-20	ZCD

C10 SERIES

TUBE-TYPE TIRES USED WITH SINGLE REAR WHEELS

6.50-16 /C (6 PR) Truck Type. Maximum Tire Capacity (Each)—Front (1610) Rear (1610)

Not available when F44 HD Chassis is specified.

Highway Nylon Blackwall

Front	5.00	9	0	XMG
Rear	5.00	0	9	YMG
Spare				
With under frame mounted spare wheel carrier	5.00	-1	6	ZMG
With P13 side mounted spare wheel carrier	5.00	27	-22	ZMG

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price ◇
----------------	-----------------------------------	----------------------	---------------	---------------	------------	--------------------------------

C10 SERIES

TUBE-TYPE TIRES USED WITH SINGLE REAR WHEELS

7.00-15 /C (6 PR) Truck Type. Maximum Tire Capacity (Each)—Front (1720) Rear (1720)

Not available when F44 HD Chassis is specified.

Highway Nylon Blackwall

Front	6.00	13	0	XNH
Rear	6.00	0	13	YNH
Spare				
With under frame mounted spare wheel carrier	6.00	-2	9	ZNH
With P13 side mounted spare wheel carrier	6.00	26	-19	ZNH

7.00-16 /C (6 PR) Truck Type. Maximum Tire Capacity (Each)— Front (1800) Rear (1800)

Not available when F44 HD Chassis and V8 engine are specified.

Highway Nylon Blackwall

Front				
Without F44 HD Chassis	6.00	42	0	XNK
With F44 HD Chassis	6.00	42	0	XNK
Rear				
Without F44 HD Chassis	6.00	0	42	YNK
With F44 HD Chassis	6.00	0	42	YNK
Spare				
With under frame mounted spare wheel carrier				
Without F44 HD Chassis	6.00	-5	26	ZNK
With F44 HD Chassis	6.00	-5	26	ZNK
With P13 side mounted spare wheel carrier				
Without F44 HD Chassis	6.00	32	-11	ZNK
With F44 HD Chassis	6.00	32	-11	ZNK

On-Off Road Nylon

Rear				
Without F44 HD Chassis	6.00	0	54	YNL
With F44 HD Chassis	6.00	0	54	YNL
Spare				
With under frame mounted spare wheel carrier				
Without F44 HD Chassis	6.00	-7	34	ZNL
With F44 HD Chassis	6.00	-7	34	ZNL
With P13 side mounted spare wheel carrier				
Without F44 HD Chassis	6.00	34	-7	ZNL
With F44 HD Chassis	6.00	34	-7	ZNL

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H ⁵	List Price	Mfr's Suggested Retail Price◇
----------------	-----------------------------------	----------------------	---------------	--------------------------	------------	-------------------------------

K10 SERIES

TUBELESS TIRES USED WITH SINGLE REAR WHEELS

L78-15 /B Passenger Type. Maximum Tire Capacity (Each)— Front (1790) Rear (1790)

Highway Bias Belted Ply Blackwall

Front (Standard)	6.00	0	0	XLB
Rear (Standard)	6.00	0	0	YLB
Spare (Standard)				
With under frame mounted spare wheel carrier.	6.00	0	0	ZLB
With P13 side mounted spare wheel carrier	6.00	28	-28	ZLB

Highway Bias Belted Ply White Stripe

Front	6.00	1	0	XLD
Rear	6.00	0	1	YLD
Spare				
With under frame mounted spare wheel carrier.	6.00	0	1	ZLD
With P13 side mounted spare wheel carrier	6.00	20	-19	ZLD

On-Off Road Bias Belted Ply Blackwall

Front	6.00	4	0	XLC
Rear	6.00	0	4	YLC
Spare				
With under frame mounted spare wheel carrier.	6.00	-1	4	ZLC
With P13 side mounted spare wheel carrier	6.00	29	-26	ZLC

LR78-15 /C Passenger Type. Maximum Tire Capacity (Each)—Front (1910) Rear (1910)

Highway Steel Belted Radial Ply White Stripe

Front	6.00	5	0	XCD
Rear	6.00	0	5	YCD
Spare				
With under frame mounted spare wheel carrier.	6.00	-1	4	ZCD
With P13 side mounted spare wheel carrier	6.00	29	-26	ZCD

K10 SERIES

TUBELESS WIDE BASE TYPE TIRES USED WITH SINGLE REAR WHEELS

10-15 /B (4 PR) Truck Type. Maximum Tire Capacity (Each)—Front (1760) Rear (1760)

On-Off Road Blackwall

Front	8.00	25	0	XWR
Rear	8.00	0	25	YWR
Spare				
With under frame mounted spare wheel carrier.	8.00	-3	15	ZWR
With P13 side mounted spare wheel carrier	8.00	31	-19	ZWR

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price ◇
----------------	-----------------------------------	----------------------	---------------	---------------	------------	--------------------------------

K10 SERIES

TUBE-TYPE TIRES USED WITH SINGLE REAR WHEELS

7.00-16 /C (6 PR) Truck Type. Maximum Tire Capacity (Each)— Front (1800) Rear (1800)

Highway Nylon

Front	6.00	33	0	XNK
Rear	6.00	0	33	YNK
Spare				
With under frame mounted spare wheel carrier	6.00	-4	21	ZNK
With P13 side mounted spare wheel carrier	6.00	32	-15	ZNK

On-Off Road Nylon

Front	6.00	45	0	XLN
Rear	6.00	0	45	YNL
Spare				
With under frame mounted spare wheel carrier	6.00	-5	27	ZNL
With P13 side mounted spare wheel carrier	6.00	33	-11	ZNL

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Page 49

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price ◇
----------------	-----------------------------------	----------------------	---------------	---------------	------------	--------------------------------

C-K20 OR C30 SERIES — REGULAR CAB WIDE BASE TUBELESS TIRES USED WITH SINGLE REAR WHEELS

9.50-16.5 /D (8 PR) Maximum Tire Capacity (Each)— Front (2780) Rear (2780)

Highway Nylon

Front	6.75	33	0	XUD
Rear				
Without spare tire				
With under frame mounted spare wheel carrier	6.75	-1	39	YUD
With P13 side mounted spare wheel carrier	6.75	16	22	YUD
With spare tire	6.75	0	33	YUD
Spare				
With under frame mounted spare wheel carrier	6.75	-13	66	ZUD
With P13 side mounted spare wheel carrier	6.75	28	25	ZUD

On-Off Road Nylon

Front, K20 series only	6.75	38	0	XUE
Rear				
Without spare tire				
With under frame mounted spare wheel carrier	6.75	-1	44	YUE
With P13 side mounted spare wheel carrier	6.75	16	27	YUE
With spare tire	6.75	0	38	YUE
Spare				
With under frame mounted spare wheel carrier	6.75	-14	70	ZUE
With P13 side mounted spare wheel carrier	6.75	29	27	ZUE

9.50-16.5 /E (10 PR) Maximum Tire Capacity (Each)— Front (3170) Rear (3170)

Highway Nylon

Front, C30 series only	6.75	37	0	XUG
Rear, C30 series only				
Without spare tire				
With under frame mounted spare wheel carrier	6.75	-1	43	YUG
With P13 side mounted spare wheel carrier	6.75	16	26	YUG
With spare tire	6.75	0	37	YUG
Spare, C30 series only				
With under frame mounted spare wheel carrier	6.75	-16	76	ZUG
With P13 side mounted spare wheel carrier	6.75	30	30	ZUG

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price◇
C-K20 OR C30 SERIES — REGULAR CAB						
TUBE-TYPE TIRES USED WITH SINGLE REAR WHEELS						
7.50-16 /C (6 PR) Maximum Tire Capacity (Each)— Front (2060) Rear (2060)						
Highway Nylon						
Front	6.50	28 0		XPB		
Rear						
Without spare tire						
With under frame mounted spare wheel carrier.....	6.50	-1 36		YPB		
With P13 side mounted spare wheel carrier	6.50	14 21		YPB		
With spare tire	6.50	0 28		YPB		
Spare						
With under frame mounted spare wheel carrier.....	6.50	-14 65		ZPB		
With P13 side mounted spare wheel carrier	6.50	28 23		ZPB		
On-Off Road Nylon						
Front. K20 series only.....	6.50	46 0		XPC		
Rear						
Without spare tire						
With under frame mounted spare wheel carrier.....	6.50	-1 38		YPC		
With P13 side mounted spare wheel carrier	6.50	14 39		YPC		
With spare tire	6.50	0 46		YPC		
Spare						
With under frame mounted spare wheel carrier.....	6.50	-17 77		ZPC		
With P13 side mounted spare wheel carrier	6.50	30 30		ZPC		

**See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.**

**C-K20 OR C30 SERIES — REGULAR CAB
TUBE-TYPE TIRES USED WITH SINGLE REAR WHEELS**

Front. K20 series only.	6.50	46	0	XPG
Rear				
Without spare tire				
With under frame mounted spare wheel carrier.	6.50	-1	54	YPG
With P13 side mounted spare wheel carrier	6.50	14	39	YPG
With spare tire	6.50	0	46	YPG
Spare				
With under frame mounted spare wheel carrier.	6.50	-17	77	ZPG
With P13 side mounted spare wheel carrier	6.50	30	30	ZPG

Front, K20 series only	6.50	38	0	XPL
Rear				
Without spare tire				
With under frame mounted spare wheel carrier	6.50	-1	46	YPL
With P13 side mounted spare wheel carrier	6.50	14	31	YPL
With spare tire	6.50	0	38	YPL
Spare				
With under frame mounted spare wheel carrier	6.50	-16	73	ZPL
With P13 side mounted spare wheel carrier	6.50	29	28	ZPL

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price ◇
C20 SERIES FLEETSIDE BONUS CAB						
WIDE BASE TUBELESS TIRES USED WITH SINGLE REAR WHEELS						
8.75-16.5 /C (6 PR) Maximum Tire Capacity (Each)— Front (1990)						
Highway Nylon						
Front (Standard)	6.00	0 0	XTC			
Spare						
With under frame mounted spare wheel carrier.	6.00	-7 43	ZTC			
With P13 side mounted spare wheel carrier	6.00	23 13	ZTC			
8.75-16.5 /D (8 PR) Maximum Tire Capacity (Each)— Front (2350) (Rear 2350)						
Highway Nylon						
Front	6.00	8 0	XTE			
Rear (Standard)						
Without spare tire						
With under frame mounted spare wheel carrier.	6.00	0 0	YTE			
With P13 side mounted spare wheel carrier	6.00	15 -15	YTE			
With spare tire	6.00	0 0	YTE			
Spare						
With under frame mounted spare wheel carrier.	6.00	-8 48	ZTE			
With P13 side mounted spare wheel carrier	6.00	25 15	ZTE			
On-Off Road Nylon						
Rear						
Without spare tire						
With under frame mounted spare wheel carrier.	6.00	0 5	YTF			
With P13 side mounted spare wheel carrier	6.00	15 -10	YTF			
With spare tire	6.00	0 5	YTF			
Spare						
With under frame mounted spare wheel carrier.	6.00	-8 47	ZTF			
With P13 side mounted spare wheel carrier	6.00	24 15	ZTF			
9.50-16.5 /D (8 PR) Maximum Tire Capacity (Each)— Front (2780) Rear (2780)						
Highway Nylon						
Front	6.75	33 0	XUD			
Rear						
Without spare tire						
With frame mounted spare wheel carrier.	6.75	-1 22	YUD			
With P13 side mounted spare wheel carrier	6.75	12 9	YUD			
With spare tire	6.75	0 16	YUD			
Spare						
With under frame mounted spare wheel carrier.	6.75	-9 57	ZUD			
With P13 side mounted spare wheel carrier	6.75	22 26	ZUD			
On-Off Road Nylon						
Rear						
Without spare tire						
With under frame mounted spare wheel carrier.	6.75	-1 27	YUE			
With P13 side mounted spare wheel carrier	6.75	12 14	YUE			
With spare tire	6.75	0 21	YUE			
Spare						
With under frame mounted spare wheel carrier.	6.75	-10 61	ZUE			
With P13 side mounted spare wheel carrier	6.75	23 28	ZUE			

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&Hs	List Price	Mfr's Suggested Retail Price ♦
C20 SERIES FLEETSIDE BONUS CAB						
TUBE-TYPE TIRES USED WITH SINGLE REAR WHEELS						
7.50-16 /C (6 PR) Maximum Tire Capacity (Each)— Front (2060)						
Highway Nylon						
Front	6.50	28 0		XPB		
Spare						
With frame mounted spare wheel carrier	6.50	-8 54		ZPB		
With P13 side mounted spare wheel carrier	6.50	22 24		ZPB		
7.50-16 /D (8 PR) Maximum Tire Capacity (Each)— Front (2440) Rear (2440)						
Highway Nylon						
Front	6.50	29 0		XPF		
Rear						
Without spare tire						
With under frame mounted spare wheel carrier	6.50	-1 29		YPF		
With P13 side mounted spare wheel carrier	6.50	14 14		YPF		
With spare tire	6.50	0 21		YPF		
Spare						
With under frame mounted spare wheel carrier	6.50	-8 54		ZPF		
With P13 side mounted spare wheel carrier	6.50	22 24		ZPF		
On-Off Road Nylon						
Rear						
Without spare tire						
With under frame mounted spare wheel carrier	6.50	-1 47		YPG		
With P13 side mounted spare wheel carrier	6.50	14 32		YPG		
With spare tire	6.50	0 39		YPG		
Spare						
With under frame mounted spare wheel carrier	6.50	-9 64		ZPG		
With P13 side mounted spare wheel carrier	6.50	24 31		ZPG		
7.50-16 /E (10 PR) Maximum Tire Capacity (Each)— Front (2780) Rear (2780)						
Highway Nylon						
Front	6.50	28 0		XPB		
Rear						
Without spare tire						
With under frame mounted spare wheel carrier	6.50	-1 28		YPK		
With P13 side mounted spare wheel carrier	6.50	14 13		YPK		
With spare tire	6.50	0 20		YPK		
Spare						
With under frame mounted spare wheel carrier	6.50	-8 59		ZPK		
With P13 side mounted spare wheel carrier	6.50	25 26		ZPK		
On-Off Road Nylon						
Rear						
Without spare tire						
With under frame mounted spare wheel carrier	6.50	-1 38		YPL		
With P13 side mounted spare wheel carrier	6.50	14 23		YPL		
With spare tire	6.50	0 30		YPL		
Spare						
With under frame mounted spare wheel carrier	6.50	-9 66		ZPL		
With P13 side mounted spare wheel carrier	6.50	28 29		ZPL		

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H's	List Price	Mfr's Suggested Retail Price ◇
----------------	-----------------------------------	----------------------	---------------	---------------	------------	--------------------------------

C20 SERIES FLEETSIDE CREW CAB WIDE BASE TUBELESS TIRES USED WITH SINGLE REAR WHEELS

9.50-16.5 /D (8 PR) Maximum Tire Capacity (Each)— Front (2780) Rear (2780)

Highway Nylon

Front (Standard)	6.75	0	0	XUD
Rear (Standard)				
Without spare tire				
With under frame mounted spare wheel carrier	6.75	0	0	YUD
With P13 side mounted spare wheel carrier	6.75	12	-12	YUD
With spare tire	6.75	0	0	YUD
Spare				
With under frame mounted spare wheel carrier	6.75	-9	57	ZUD
With P13 side mounted spare wheel carrier	6.75	22	26	ZUD

On-Off Road Nylon

Rear				
Without spare tire				
With under frame mounted spare wheel carrier	6.75	0	16	YUE
With P13 side mounted spare wheel carrier	6.75	12	4	YUE
With spare tire	6.75	0	16	YUE
Spare				
With under frame mounted spare wheel carrier	6.75	-10	61	ZUE
With P13 side mounted spare wheel carrier	6.75	23	28	ZUE

C30 SERIES FLEETSIDE CREW CAB WIDE BASE TUBELESS TIRES USED WITH SINGLE REAR WHEELS

9.50-16.5 /E (10 PR) Maximum Tire Capacity (Each)— Front (3170) Rear (3170)

Highway Nylon

Front (Standard)	6.75	0	0	XUG
Rear (Standard)				
Without spare tire				
With under frame mounted spare wheel carrier	6.75	0	0	YUG
With P13 side mounted spare wheel carrier	6.75	12	-12	YUG
With spare tire	6.75	0	0	YUG
Spare				
With under frame mounted spare wheel carrier	6.75	-9	64	ZUG
With P13 side mounted spare wheel carrier	6.75	24	31	ZUG

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H ⁵	List Price	Mfr's Suggested Retail Price ◇
V8 C30 FLEETSIDE REGULAR CAB SERIES WITH CAMPER SPECIAL CHASSIS EQUIPMENT ONLY						
WIDE BASE TUBELESS TIRES USED WITH DUAL REAR WHEELS						

Dealer Note: When dual rear tires are specified R05, Dual Rear Wheels, will be applied to the order.
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.
For complete specifications and ordering information, see "OTHER OPTIONS" Section.

8.75-16.5 /C (6 PR) Maximum Tire Capacity (Each)— Front (1990) Dual Rear (1750)

Highway Nylon

Front	6.00	0	0	XTC
Rear	6.00	0	177	YTC
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier	6.00	-10	46	ZTC
With P13 side mounted spare wheel carrier	6.00	23	13	ZTC

On-Off Road Nylon

Rear	6.00	0	160	YTB
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier	6.00	-10	47	ZTB
With P13 side mounted spare wheel carrier	6.00	24	13	ZTB

8.75-16.5 /D (8 PR) Maximum Tire Capacity (Each)— Front (2350) Dual Rear (2070)

Highway Nylon

Front	6.00	8	0	XTE
Rear	6.00	0	193	YTE
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier	6.00	-11	51	ZTE
With P13 side mounted spare wheel carrier	6.00	25	15	ZTE

On-Off Road Nylon

Rear	6.00	0	182	YTF
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier	6.00	-11	50	ZTF
With P13 side mounted spare wheel carrier	6.00	24	15	ZTF

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&Hs	List Price	Mfr's Suggested Retail Price◇
V8 C30 FLEETSIDE REGULAR CAB SERIES WITH CAMPER SPECIAL CHASSIS EQUIPMENT ONLY						
TUBE-TYPE TIRES USED WITH DUAL REAR WHEELS						

Dealer Note: When dual rear tires are specified R05, Dual Rear Wheels, will be applied to the order.
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.
For complete specifications and ordering information, see "OTHER OPTIONS" Section.

7.50-16 /C (6 PR) Maximum Tire Capacity (Each)— Front (2060) Dual Rear (1815)

Highway Nylon

Front.....	5.50	28	0	XPB
Rear.....	5.50	0	188	YPB
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier.....	5.50	-14	65	ZPB
With P13 side mounted spare wheel carrier.....	5.50	28	23	ZPB

On-Off Road Nylon

Rear.....	5.50	0	222	YPC
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier.....	5.50	-17	77	ZPC
With P13 side mounted spare wheel carrier.....	5.50	30	30	ZPC

7.50-16 /D (8 PR) Maximum Tire Capacity (Each)— Front (2440) Dual Rear (2140)

Highway Nylon

Front.....	5.50	29	0	XPF
Rear.....	5.50	0	189	YPF
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier.....	5.50	-14	65	ZPF
With P13 side mounted spare wheel carrier.....	5.50	28	23	ZPF

On-Off Road Nylon

Rear.....	5.50	0	224	YPG
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier.....	5.50	-17	77	ZPG
With P13 side mounted spare wheel carrier.....	5.50	30	30	ZPG

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H ⁵	List Price	Mfr's Suggested Retail Price◇
----------------	-----------------------------------	----------------------	---------------	--------------------------	------------	-------------------------------

V8 C30 BONUS CAB/CREW CAB WITH CAMPER SPECIAL EQUIPMENT ONLY WIDE BASE TUBELESS TIRES USED WITH DUAL REAR WHEELS

Dealer Note: When dual rear tires are specified R05, Dual Rear Wheels, will be applied to the order.
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.
For complete specifications and ordering information, see "OTHER OPTIONS" Section.

8.75-16.5 /C (6 PR) Maximum Tire Capacity (Each)— Front (1990)

Highway Nylon

Front	6.00	-18	0	XTC
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier	6.00	-7	43	ZTC
With P13 side mounted spare wheel carrier	6.00	23	13	ZTC

8.75-16.5 /D (8 PR) Maximum Tire Capacity (Each)— Front (2350) Dual Rear (2070)

Highway Nylon

Front	6.00	-16	0	XTE
Rear	6.00	0	146	YTE
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier	6.00	-8	48	ZTE
With P13 side mounted spare wheel carrier	6.00	25	15	ZTE

On-Off Road Nylon

Rear	6.00	0	135	YTF
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier	6.00	-8	47	ZTF
With P13 side mounted spare wheel carrier	6.00	24	15	ZTF

PICKUP

FACTORY INSTALLED TIRES

See Tire Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&Hs	List Price	Mfr's Suggested Retail Price◇
----------------	-----------------------------------	----------------------	---------------	--------------	------------	-------------------------------

V8 C30 BONUS CAB/CREW CAB WITH CAMPER SPECIAL EQUIPMENT ONLY TUBE-TYPE TIRES USED WITH DUAL REAR WHEELS

Dealer Note: When dual rear tires are specified R05, Dual Rear Wheels, will be applied to the order.
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.
For complete specifications and ordering information, see "OTHER OPTIONS" Section.

7.50-16 /C (6 PR) Maximum Tire Capacity (Each)— Front (2060)

Highway Nylon

Front	5.50	-7	0	XPB
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier	5.50	-8	54	ZPB
With P13 side mounted spare wheel carrier	5.50	22	24	ZPB

7.50-16 /D (8 PR) Maximum Tire Capacity (Each)— Front (2440) Dual Rear (2140)

Highway Nylon

Front	5.50	-7	0	XPF
Rear	5.50	0	152	YPF
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier	5.50	-8	54	ZPF
With P13 side mounted spare wheel carrier	5.50	22	24	ZPF

On-Off Road Nylon

Rear	5.50	0	187	YPG
Spare. Available only when optional spare wheel carrier is specified.				
With P10 or P11 spare wheel carrier	5.50	-9	64	ZPG
With P13 side mounted spare wheel carrier	5.50	24	31	ZPG

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Page 60

DEALER INSTALLED ACCESSORY WEIGHTS

Item	Add Weight (lbs.)		
	Front	Rear	Total
Antenna, Radio.....	2	0	2
Antenna, CB Radio.....	-2	7	5
Antenna, CB Radio, Gutter Clip.....	1	1	2
Belt, Shoulder.....	2	1	3
Blanket, Battery Warmer.....	1	0	1
Cap, Locking Gas.....	0	1	1
Carrier, Glide-out Spare Tire.....	-4	20	16
Compass, Auto.....	1	0	1
Cooler, Engine Oil.....	5	-1	4
Cooler, Transmission Oil.....	5	-1	4
Cover, Tonneau, Pickup Box.....	1	9	10
Cruise Control, Cruisemaster.....	5	1	6
Extinguisher, Fire.....	2	2	4
Guard, Bumper Front, Hi-Rise.....	11	-2	9
Guard, Grille, Brush Type.....	46	-8	38
Hook, Cargo Tie-Down.....	0	2	2
Hitch, Trailer-Equalizer & Platform.....	-19	74	55
Hitch, Trailer-Frame Mounted.....	-9	34	25
Lamp, Glove Compartment.....	1	0	1
Lamp, Underhood.....	1	0	1
Lock, Glove Compartment.....	1	0	1
Lock, Spare Tire.....	-1	5	4
Radio, AM-Stereo-Tape Combination.....	13	4	17
Radio, Citizens Band-23 Channel.....	3	1	4
Rail, Side Pickup Box.....	1	10	11
Spotlight, Hand Portable.....	1	0	1
Step, Auxiliary.....	5	5	10
Ventshades.....	2	0	2
Warmer, Interior.....	4	1	5
Winch, Bumper.....	258	-58	200

